

kip[®]

Sticks to quality



3
Series

PRODUCT CATALOGUE

2023



Always the
latest version
online

kip

Kip® GmbH is a leading supplier of adhesive tapes and has been operating successfully for more than 50 years now. Since the very start we have used our close connections within the trade to develop innovative ideas and turn these into high-quality products. We have done truly pioneering work in this market segment and turned adhesive tape into an indispensable tool for professionals.



„Kip® sticks to quality“

Proof of this claim can be seen in the ULTRA SHARP® product that was developed and introduced by Kip®. The only professional painter's tape with ULTRA SHARP® technology that ensures sharp paint lines on textured surfaces, without the need to pre-coat and without filling agents like acrylic.

Kip® GmbH became a 100% subsidiary of Shurtape® Technologies LLC in 2000. This close alliance was the next logical step in a decades-long partnership and has further strengthened our capabilities in the areas of research & development and production. We are motivated each and every day, as has always been the case, to continually improve our range of adhesive tapes and develop new innovations that will make your work even easier and allow you to get things done more effectively.

Whether you need Kip® Masking tape, Protective film, Masker, Duct tape or Cloth tape: we have the right product for you whatever your needs. Kip® products – which can be recognised by their red core – are subject to stringent quality controls, from production right through to shipment, and are known around the world for their quality.

In order to better meet the demands of various different types of customer groups, our product range has been optimised in line with the needs expressed by target consumers.




This optimisation applies not just to visual appearance, but also to packaging sizes and storage concepts.


The Kip® 3 series has been specially designed to meet the needs of large consumers. The items are conveniently supplied as stacks of rolls wrapped in shrink wrap.

Individual rolls and stacks have their own EAN code – which means that you can decide for yourself which sales unit is most appropriate to you – box, stack or individual rolls. This flexibility is supported by the new Kip® wire basket shelf concept that enables optimal product presentation.



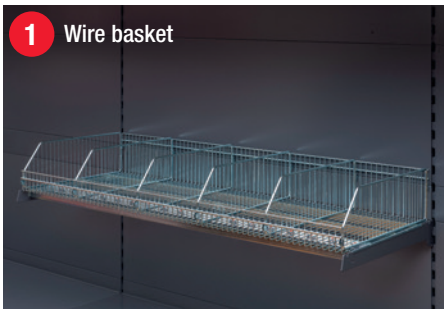

1 Wire basket

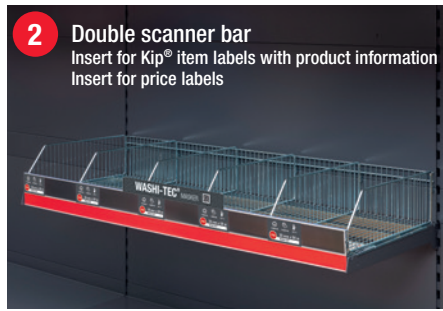

2 Double scanner bar
Insert for Kip® item labels with product information
Insert for price labels



3 Stacks and individual rolls



3 Stacks

OR

THE 3 SERIES CONCEPT

- The two inserts in the double scanner bar provide space for individual price labels as well as the Kip® item labels with information about the items.
- These items are now also available as shrink-wrapped roll stacks. This is a handy

intermediate size and alternative to the individual rolls and large boxes.

- The individual rolls and the stacks have their own EAN code.

THE KIP® 3 SERIES WITH STANDARD BOXES, ROLL STACKS AND INDIVIDUAL ROLLS



STANDARD BOX WITH EAN
(contains stacks of rolls with a pack EAN)



ROLL STACK WITH A PACK EAN
(contains individual rolls with roll EAN)



INDIVIDUAL ROLLS WITH ROLL EAN

PRODUCT SELECTION MADE SIMPLE

We have summarised the key technical information about each product in a pictogram to make selecting the right product as simple as possible:



INDOOR SERVICE LIFE

Specifies how long the tape can remain in place indoors without leaving any residues upon removal.



OUTDOOR SERVICE LIFE

Specifies how long the tape can remain in place outdoors without leaving any residues upon removal.



TEMPERATURE RESISTANCE

Specifies the temperature that an adhesive tape can withstand for a short period after being attached in place without becoming damaged or leaving behind adhesive residues.



ADHESIVE STRENGTH (STEEL)

Specifies how much force measured in newtons is required to remove a 10 mm wide adhesive tape at an angle of 180 degrees and at a uniform and defined speed from a polished steel plate.





Look for our FSC®-certified products

We are constantly working to improve our organisation so that we can be a responsible company that benefits our employees, customers and trade partners. This philosophy also ensures that we take into account the social, ecological and economic effects of our business activities throughout our entire decision-making process. We are committed to offering products of the highest quality, developed and produced in a way that reflects our commitment as an environmentally and socially conscious organisation.

Sustainability at Kip®

ENVIRONMENTAL PROTECTION

We comply with the strict requirements of the relevant chemical legislation to guarantee the protection of our employees, consumers and the environment. ALL of our products comply with REACH. We avoid and minimise waste by carrying out annual energy savings assessments which monitor the consumption of water, natural gas and electricity, as well as emissions in relation to VOCs and greenhouse gases.

We are committed to responsible procurement of fibres/paper and sustainable management of the forests that produce these materials. As a result of this commitment, the Kip® company received FSC™ certification in 2020 and PEFC certification in 2021. In addition to the company, some of our products are already FSC™ certified, such as our ULTRA SHARP® 3301 or SMOOTH TEC® 307, or our DIY tape, FrogTape® Multi-Surface. Our range also includes solvent-free products such as our SMOOTH TEC® 307. Our 331 masking paper consists of recycled paper, while the 397 MASKING-TEC® cover is made of PEFC-certified paper. We are always working to expand our range of eco-friendly products and to produce our existing products as sustainably as possible.



LOYALTY AND EDUCATION


Treating all customers, suppliers and employees with fairness, dignity and respect is a key concern of ours, while ethics and sustainability in the supply chain play major roles in our daily business practices. We adopt a zero-tolerance stance towards human trafficking, slavery or forced labour of any kind and expect the same standards from our global supply chain. We comply with the applicable regional laws and provisions and demand the highest standards from our partners along the supply chain. We are therefore also a registered member of SEDEX. Our commitment lies in maintaining the highest ethical standards of conduct among our employees, managers, directors and business partners.

All of our employees are obligated to sign and comply with the Kip® Code of Conduct and Ethics. A sense of community, fairness and social responsibility make up our corporate culture and drive our day-to-day decisions. Our employees' health is important to us – and not just during the coronavirus pandemic. We also rely on extensive further training programmes to ensure that our employees are given the best preparation for their daily activities.



CIRCULAR ECONOMY

Aside from our products themselves, we also pursue a sustainable packaging concept to keep packaging to a minimum and to only use as much as is actually needed. Together with our service providers, we develop solutions for returning waste to efficient productivity through recycling, preserving both valuable resources and the environment. As part of its annual study “resources SAVED by recycling”, the Fraunhofer Institute UMSICHT documents the benefit to the climate and environment. Every year this substantiates, down to the exact kilogram, how consistent cycle management of raw materials helps to protect climate and resources. In terms of packaging material, our measures helped us to achieve the following results in 2021:



Ressourceneinsparung 2021



Gewicht von 2.102 Apfelbäumen

Eingesparte Treibhausgasemission 2021



97.022 Kilogramm

resources SAVED

2021

Wir sparen 891 Tonnen Ressourcen durch Recycling mit Interserob.



MASKING TAPE FROM A-Z 8 – 11

How do I choose the right tape? 8 – 11

Overview of categories MASKING TAPE FROM A-Z



MASKING-TEC® CREPE MASKING TAPE 12 – 21

MASKING-TEC® CREPE MASKING TAPE.. 16 – 17

301, 300, 305, 304, 3804

MASKING-TEC® MASKER 19

332, 334, 3832, 3834

MASKING-TEC® SPECIALS 18, 20 – 21

363, 303, 397, 3301



SMOOTH-TEC® SMOOTH MASKING TAPE 22 – 27

SMOOTH-TEC® SMOOTH MASKING TAPE 26

307, 3508

SMOOTH-TEC® SPECIAL 26

3307



WASHI-TEC® GOLD MASKING TAPE 28 – 35

WASHI-TEC® GOLD MASKING TAPE..... 32 – 33

3308, 3808, 3608

WASHI-TEC® SPECIALS..... 33 – 35

3373, 309, 3377, 3388, 396, 308

WASHI-TEC® MASKER..... 34 – 35

3888, 3688, 348

PLASTER AND STUCCO.....36 – 49

PVC and PE protective tape 36 – 41
 315, 3815, 317, 318, 3817, 3818, 319, 3319, 3819, 365, 310, 362, 3810
 Duct tape..... 42 – 45
 326, 324, 325, 3824, 3825, 3315, 327, 364
 Cloth tape..... 46 – 49
 328, 329, 3829, 380, 358, 359, 3325, 323



LARGE-SCALE PROTECTION.....50 – 59

Masker 50 – 55
 332, 3832, 3888, 348, 3688, 334, 3377, 3834, 333, 383, 3833, 384, 385, 3388
 Protective film..... 56 - 57
 313, 3813, 357
 Foil-Mask, Flex-Mask® 57- 58
 322, 353
 Masking paper 59
 336, 331
 Films and sheets..... 59
 350, 351, 352, 355

TAPE FOR NEW BUILDS, EXTENSIONS AND RENOVATIONS.....60 – 67

Jointing tape 61 – 62
 343, 3843, 366
 Installation tape 62
 338
 Carpet tape 62 – 63
 342, 341, 389, 337
 Aluminium tape..... 64
 345, 344
 Warning tape..... 64 – 65
 339, 3824, 391
 Tapes for creating DIN EnEV moisture barriers 66 – 67
 347



PACKAGING TAPE.....68 – 71

Packaging tape 68 – 71
 3339, 339, 3839



ACCESSORIES..... 72 – 77

Dispensers, Dust protection door, Downpipe for gutters, Garbage bags, Kip® film, Eco cleaner, Applicator, Flex-Blade..... 72 – 77
 330, 335, 394, 335, 395, 398, 335, 346, 354, 339, 335, 790



GOOD TO KNOW.....80 – 83

Structure, technical properties and use of adhesive tape..... 80 – 83

MYKIP® 78 – 79

myKip® Distributor online portal, for reviewing orders, tracking shipments, printing invoices, packing lists or order confirmations, and viewing prices..... 78 – 79





MASKING-TEC®
CREPE MASKING TAPE

SMOOTH-TEC®
SMOOTH MASKING TAPE

WASHI-TEC®
GOLD MASKING TAPE

MASKING TAPE FROM A-Z

Masking tape for every paintscape



HOW DO I CHOOSE THE RIGHT TAPE?

Crepe tape goes with painting like walls go with a house. But not all painter's tapes are created equally. We've all peeled back the masking tape only to have it tear, leave a residue, remove some of the paint – or to discover that the colour has bled beneath it. Even professionals can have a bad tape day.

Not with Kip®. Because we believe you deserve the best materials for the task at hand. But how do you know what's best?

Simply apply our golden rule:
Pay careful attention to the application and

surface, because they can make all the difference in your choice of tape.

It's always a good idea to check the conditions a particular tape is best suited for. What might seem close enough at first glance could turn out to be totally off the mark – and your paint edge.

The adhesive on the reverse is a key feature of painter's tape.

Private customers in particular place a premium on flawless results. That's why we ensure you have exactly the right masking tape for the job.



 More information	MASKING-TEC® CREPE MASKING TAPE	SMOOTH-TEC® SMOOTH MASKING TAPE	WASHI-TEC® GOLD MASKING TAPE
Paper type	Creped paper	Lightly creped to smooth paper	Extra smooth Japanese paper with JINZOKEI® fibres
Usage time	Days	Weeks	Months
Area of use	For short-term covering work, primarily indoors	The all-rounder for almost all covering work	For when the sharpest lines are needed

THE CREPE DE LA CREPE OF MASKING TAPE.

There's no shortage of masking tape on hardware store shelves. But it's time to separate your new best bud from another dud.

After all, why settle for any old painter's tape when you can get high-quality masking tailored to your client's needs, the surface and service life? Do it once, but do it right. Ideally, with an efficient system solution.

We've got you – and your project – covered.

With our three painter's tapes, **MASKING-TEC®** crepe masking tape, **SMOOTH-TEC®** smooth masking tape and **WASHI-TEC®** gold masking tape, you get three different quality grades and first-time results. No touch-ups or repairs.

That adds up to the crepe de la crepe of masking tape. What more could you ask for?!



With its superior adhesive strength, **MASKING-TEC®** hugs every line and wave even on rough, dusty surfaces.



SMOOTH-TEC® is the perfect player for clean results on almost any masking gig. It keeps a low profile but is a real high-flyer.



For our top-of-the-range masking tape that delivers razor-sharp precision, go for **WASHI-TEC®**. Its tear-resistant **JINZOKEI®** fibres guarantee ultra-clean lines every time.





MASKING-TEC®
CREPE MASKING TAPE

SMOOTH-TEC®
SMOOTH MASKING TAPE

WASHI-TEC®
GOLD MASKING TAPE

*Strong,
rough &
tough!*



Get all the big breaks.

Epic, even on rough, dusty surfaces.

- Lightly creped painter's tape
- Natural rubber adhesive provides excellent sticking power
- Suitable for short-term use indoors
- High elasticity lets the tape conform to contours
- Water- and moisture-resistant

Riding a perfect line down the face of a wave takes serious skill. As for perfectly clean paint lines, now that's a cinch. Just take **KIP® MASKING-TEC®** on board.

Wipeouts? Don't panic, **MASKING-TEC®** masking tape will hold steady. Thanks to its premium natural rubber adhesive, it sticks to anything – even to rough, dusty surfaces. Naturally not every line is straight. So we made a tape that's highly elastic to hug contours and let you flip and turn on almost any indoor paint job. Enjoy unlimited freedom to glide brush and board to a perfect ten.

Simply stick – and pull off any trick. **MASKING-TEC®** masking tape has what it takes to make even the roughest ride look and feel effortless. Try out **KIP®** and see for yourself.





Keep Cool. Kip crepe tape.



301 MASKING-TEC® EXTRA PREMIUM PLUS

Premium Plus product
for the most demanding
applications.

Excellent adhesive strength
with special waterproof
qualities.



7 DAYS



SHORT-TERM



80 °C



4,52 N/10 MM

PROPERTIES

- Lightly creped tape with high-quality natural rubber adhesive
- Excellent adhesive strength
- Specially treated for excellent resistance against water and moisture

AREA OF USE


- For short covering work, primarily for indoor use

Length in m	50	50	50	50	50	50
Width in mm	18	24	30	36	48	100
Sales units	48	36	32	24	20	12

300 MASKING-TEC® PREMIUM PLUS

Premium Plus quality with special waterproof qualities.

Very good adhesive strength.



PROPERTIES

- Lightly creped tape with high-quality natural rubber adhesive
- Very good adhesive strength
- Specially treated for excellent resistance against water and moisture
- Solvent-free

AREA OF USE

- For short covering work, primarily for indoor use

Length in m	50	50	50	50	50	50	50
Width in mm	18	24	30	36	48	75	100
Sales units	48	36	32	24	20	16	12

305 MASKING-TEC® PREMIUM

Premium product for demanding applications.



PROPERTIES

- Lightly creped tape with high-quality natural rubber adhesive
- Good adhesive strength and waterproof

AREA OF USE

- For short covering work, primarily for indoor use

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20

304 MASKING-TEC® PREMIUM

Premium product with good adhesive strength.



PROPERTIES

- Lightly creped tape with high-quality natural rubber adhesive
- Good adhesive strength and waterproof

AREA OF USE

- For short covering work, primarily for indoor use

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20

3804 MASKING-TEC® STANDARD

For general purpose masking work.



PROPERTIES

- Lightly creped tape in basic quality
- Good adhesive strength and adhesive properties
- Standard waterproof quality

AREA OF USE

- For short covering work, primarily for indoor use

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20

363 STUCCO-TAPE

Masking tape for stucco.



PROPERTIES

- Lightly creped tape with natural rubber adhesive
- Leaves no residue when removed due to good moisture resistance and long usage life
- Suitable for long-term use: up to 6 weeks
- UV- and moisture-resistant

AREA OF USE

- Particularly suitable for stucco and plastering work

Length in m	50	50	50
Width in mm	24	36	48
Sales units	36	24	20

303 MASKING TAPE FOR CURVES

Ideal for masking curves.



PROPERTIES

- Heavily creped tape with natural rubber adhesive
- Excellent elasticity

AREA OF USE

- Ideal for masking tight curves, rounded areas, window and door handles, fixtures and similar
- Primarily designed for smooth surfaces
- Also sticks to lightly rough surfaces

Length in m	50	50
Width in mm	30	50
Sales units	30	18

397 MASKING-TEC® COVER

High-strength and strong masking paper with MASKING-TEC® masking tape in professional quality.



PROPERTIES

- Easy and quick to use, no need for additional fixation
- Good moisture resistance
- Environmentally friendly: PEFC-certified 70g/m² papier

AREA OF USE

- Ideal for indoor covering and masking
- Suitable for airless applications

Length in m	45
Width in mm	900
Sales units	6



332 MASKING-TEC® MASKER PREMIUM PLUS

Professional Masker with Premium Plus masking tape for quickly and easily masking surfaces.




PROPERTIES

- High-quality Kip® Masking tape with environmentally friendly PE film
- This film attaches itself to the substrate through static charging
- Also available in a dispenser

AREA OF USE

- For quickly and fully covering and masking large surface areas (e.g. walls, windows, furniture)
- Can be used on almost all indoor surfaces

550 and 2700 mm also available in a dispenser



Length in m	33	33	33	33	33	20
Width in mm	300	550	1100	1600	1800	2700
Sales units	60	60	30	30	30	30

334 MASKING-TEC® MASKER WITH PAPER

Masking paper with Premium masking tape. For quickly masking windowsills, skirting boards, etc.




PROPERTIES

- High-quality Premium Kip® Masking tape with unbleached masking paper (50 g/m²)
- Environmentally friendly

AREA OF USE

- Save time when masking and covering door frames, skirting boards, windowsills and similar, and both mask and protect in a single operation
- Can be used on almost all indoor surfaces

Length in m	25	25	25
Width in mm	100	180	300
Sales units	30	30	15



3832 MASKING-TEC® MASKER PREMIUM

Masker with Premium masking tape. For a variety of covering applications.



PROPERTIES

- General purpose Kip® Masking tape with environmentally friendly PE film
- This film attaches itself to the substrate through static charging

AREA OF USE

- For quickly and fully covering and masking large surface areas (e.g. walls, windows, furniture)
- Can be used on almost all indoor surfaces

For film width 550mm, 1100mm, 1400mm: For film width 1800mm, 2600mm:

Length in m	33	33	33	33	20
Width in mm	550	1100	1400	1800	2700
Sales units	60	30	30	30	30



3834 MASKING-TEC® MASKER WITH PAPER

Masking paper with high-quality masking tape. For quickly masking windowsills, skirting boards, etc.



PROPERTIES

- Masking tape with unbleached masking paper (35 g/m²)
- Environmentally friendly

AREA OF USE

- Saves time when masking and covering door frames, skirting boards, windowsills and similar, and both mask and protect in a single operation
- Can be used on almost all indoor surfaces

Length in m	25	25	25
Width in mm	100	180	300
Sales units	30	30	15



CREPE MASKING TAPE on woodchip.



THE ULTRA SHARP® TECHNOLOGY


Crepe masking tape:
Noticeable cavities!
This will require expensive
prepping or touching up.

KIP® ULTRA SHARP® has a powdery
polymer coating along its edges.

It forms a gel through contact with
water-based paint.

The gel seals the cavities and stops the
paint from bleeding.

KIP® ULTRA SHARP® on woodchip.

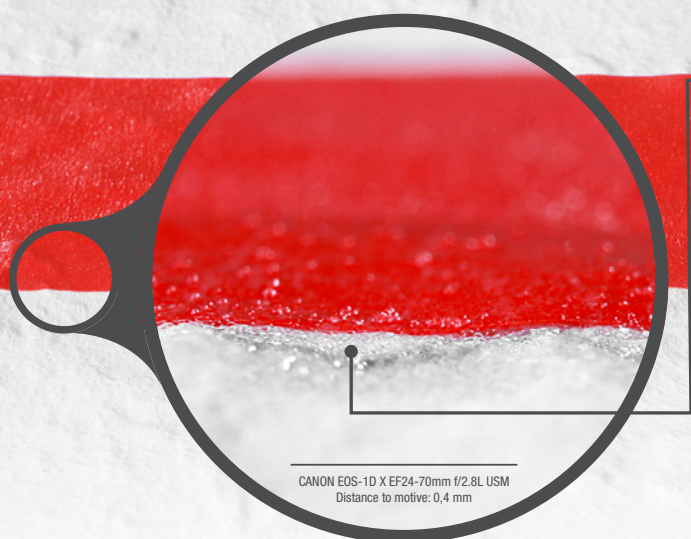

KIP® ULTRA SHARP®:
Cavities are sealed!
The gel forms a protective barrier
and stops the paint from bleeding.

KIP® ULTRA SHARP®

MORE THAN A MASKING TAPE.

3301 ULTRA SHARP®

The only professional painter's tape with Ultra Sharp® technology.



3 WEEKS



7 DAYS



80 °C



3,4 N/10 MM

PROPERTIES

- ULTRA SHARP® technology for creating perfect paint lines in a single stroke
- No pre-coat/filling agents/acrylic etc.
- Perfect adhesive strength using synthetic rubber adhesive
- Special paper with high tensile strength for professional use
- UV-resistant
- FSC™ certified

AREA OF USE

- Covering work on smooth and rough surfaces



Length in m	50	50
Width in mm	24	36
Sales units	36	24





MASKING-TEC®
CREPE MASKING TAPE

SMOOTH-TEC®
SMOOTH MASKING TAPE

WASHI-TEC®
GOLD MASKING TAPE

KIP® SMOOTH-TEC® SMOOTH MASKING TAPE



**THE
SMOOTH WAY
TO PLAY IT
ROUGH.**

KIP® SMOOTH-TEC® SMOOTH MASKING TAPE

A AND B SIDE – IT'S ALL GOOD.

Whoever rocks a roll of **Kip® SMOOTH-TEC®** has every reason to paint the town red... or any other shade, come to that. After all, Kip® makes no ordinary painter's tape. It displays star quality on every gig. Thanks to the melodic mix of smooth crepe and premium adhesive in **SMOOTH-TEC®**, every wall, ceiling and room is a riff come true.

So why cramp your style with any other crepe?

GET IN THE GROOVE

For all practical purposes, the thin masking tape is a pleasure to use. Apply it just like ordinary masking tape and look forward to a stunning performance. Think adhesive strength and tear resistance worthy of the Hall of Fame. And completely forget about bleeding. When it comes to clean lines on slightly rough surfaces, **SMOOTH-TEC®** masking tape really plays to the crowd.

MORE THAN AN ENCORE

Some acts stay on stage, playing encore after encore for their fans. But for a show that goes on and on and on... nothing beats **SMOOTH-TEC®** masking tape. Even at temperatures of up to 100°C, this UV-resistant crepe tape won't shy away from the limelight. Add to that its high adhesive strength to make it the perfect player for in- and outdoor use over extended periods. You can count on an extended solo, even in the worst Woodstock weather.



FOR SHARP EDGES ON SMOOTH AND SLIGHTLY ROUGH SURFACES

- Smooth crepe painter's tape
- Very thin, contour-conforming tape that peels off the roll easily
- High-quality adhesive that sticks evenly
- Excellent adhesion and tear resistance
- UV-resistant and suitable for extended use
- Moisture resistant thanks to premium water resistance
- Removable without residue

A REAL FAN FAVOURITE.

307 SMOOTH-TEC®

UV- and weather-resistant.
Hence, well suited to outdoor use.



2 WEEKS



2 WEEKS



90 °C



3,5 N/10 MM



SOLVENT-FREE

PROPERTIES

- Special adhesive for good resistance against UV, weathering and ageing
- High tensile strength
- FSC™ certified
- Solvent-free

AREA OF USE

- For reliable outdoor covering work

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	32	24	20	16	12



3508 SMOOTH-TEC®

Premium SMOOTH-TEC® product for sharp lines.



3 MONTHS



3 WEEKS



80 °C



1,1 N/10 MM



The mark of responsible forestry



PROPERTIES

- Thin masking tape made from SMOOTH-TEC® paper with acrylate adhesive
- UV-resistant
- Good adhesion and high tensile strength
- FSC™ certified
- Adheres to silicone*

AREA OF USE

- For sharp paint lines on smooth and lightly textured surfaces




Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20

*Silicone joints must be thoroughly dry according to the manufacturer's instructions. Final suitability for a specific material must be ensured by trial bonding.

3307 SMOOTH-TEC® EXTRA STRONG

Tough adhesive tape for outdoor use.



6 MONTHS



5 MONTHS



100 °C



1,34 N/10 MM



EXTRA TEAR RESISTANCE

PROPERTIES

- High-quality adhesive tape made from SMOOTH-TEC® paper with acrylate adhesive
- UV-resistant
- High tensile strength and good adhesive strength

AREA OF USE

- For sharp paint lines outdoors
- Also very suitable for lacquer paint and varnish

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20



kip SMOOTH-TEC®
www.kip-tape.com
Schlavenhorst 9, D-42699 Solingen

kip
Schlavenhorst 9
Untergrund
Tape voor

日本製



MASKING-TEC®
CREPE MASKING TAPE

SMOOTH-TEC®
SMOOTH MASKING TAPE

WASHI-TEC®
GOLD MASKING TAPE

KIP® WASHI-TEC® GOLD MASKING TAPE

A woman in a black jumpsuit is hanging upside down from a yellow pole. She is holding a roll of yellow tape in her right hand and a paint roller in her left hand. The background is a bright, white, sunburst-like pattern. A large red circle is centered behind her, and the text 'UNBEATABLY TEAR-RESISTANT.' is overlaid on it in large, white, bold letters.

**UNBEATABLY
TEAR-RESISTANT.**

KIP® WASHI-TEC®

A TRIED-AND-TRUSTED TRADITION.

KIP® WASHI-TEC® – not just another painter's tape.

In Japan, where quality and reliability are a point of honour, centuries-old traditions and cutting-edge technology go hand in hand. As the solution for clean, razor-sharp lines, **Kip® WASHI-TEC®** is no different. Produced exclusively in Japan, our tapes are made entirely from washi paper and reinforced with extra-long JINZOKEI® fibres.

Paper has long been central to everyday life in Japan. Passed down the generations since the seventh century, traditional papermaking includes crafting soft yet strong washi paper. In fact, in the Land of the Rising Sun it's synonymous with quality and durability. While adhesive tape can be made with various types of paper, only genuine Japanese washi paper is used for **WASHI-TEC®**.

Reinforced with synthetic fibres, washi tape is exceptionally flexible and tear-resistant. Unlike other products strengthened only with fibres whose cross section is round, **Kip® WASHI-TEC®** uses extra-long, high-quality fibres. Known as jinzōkei or kidney-shaped fibres in Japanese, they outperform everything else out there with their extraordinary tensile strength and tear resistance.

No compromise. Promise.

Only the best of everything goes into **WASHI-TEC®** tape. That's why this especially thin tape not only moulds to contours but is also tear-resistant and sturdy. It's easy to apply precisely and prevents the paint from bleeding, so you get razor-sharp paint edges.

All **WASHI-TEC®** products have one thing in common: They are engineered in the same way and reinforced with JINZOKEI® fibres. Depending on the nature of the intended application, their material and adhesive strength vary.

As the icing on top, **WASHI-TEC®** adhesive tapes are impregnated to ensure optimum moisture and tear resistance.



JINZOKEI®

In Japan, making washi paper is a tradition-steeped process that includes reinforcing the paper with jinzōkei or kidney-shaped fibres. Thanks to their unique structure, these extra-long fibres ensure that the tape is both very thin and highly tear-resistant.



KIP® WASHI-TEC®

THE ONE AND ONLY.



Reasons you'll be glued to WASHI-TEC®

Different types of tape need different adhesives. After all, the adhesive's composition and properties determine its quality.


WASHI-TEC® tapes feature a high-quality adhesive that is exceptionally moisture- and water-resistant. Including additives significantly increases the adhesive's durability and UV resistance. All of which makes **WASHI-TEC®** adhesive tapes exceptionally robust.

Draws a line and sticks to it

According to an old Japanese proverb, power arises from an unseen source. That's certainly true of one of **WASHI-TEC®** tapes' key strengths – their invisible adhesive.

There are a number of forces at play in an adhesive. Cohesive force makes the glue molecules hold on to each other, while the adhesive force makes them stick to a surface.

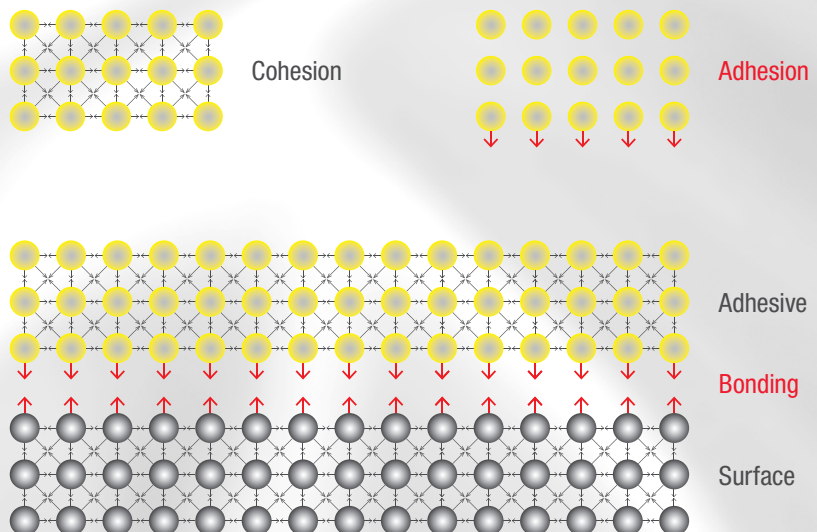

The adhesive designed for **Kip® WASHI-TEC®** harnesses adhesion and cohesion to best effect. That means the tapes are not only largely impervious to external influences, such as temperature, humidity, etc., but also boast a uniquely balanced adhesive strength. To top it all off, easy-to-remove **WASHI-TEC®** tapes leave no residue and are UV-resistant.





BOWS BEFORE EVERY APPLICATION.

The full range that's full-on. From Nippon.

Walls, ceilings and perimeters are no obstacle to a ninja. Armed with Kip® **WASHI-TEC®**, you, too, can have any building taped. Available as five different options, these genuine Japanese tapes can handle any job.

- 
3308 WASHI-TEC® Premium Plus
 This tape smooths the way over highly uniform surfaces, such as glass, paintwork, plastic and more. Thanks to its premium impregnation and balanced adhesive strength, WASHI-TEC® Premium Plus ensures incredibly sharp paint lines and top-notch results.
- 
3808 WASHI-TEC® Premium
 Whatever you're masking, WASHI-TEC® Premium has got you covered. With its quality impregnation and adhesive strength, this true all-rounder is also a real pro when it comes to painted and varnished wood.
- 
3608 WASHI-TEC® Standard
 With WASHI-TEC®, even standard is a cut above the rest. This impregnated masking tape is a strong wingman on all basic painting jobs and will impress you with its stability on acrylic joints.

- 
3373 WASHI-TEC® Extra Strong
 Fibre-reinforced tape that meets the toughest requirements. That makes it impressively tear-resistant and the ideal solution when you plan to apply multiple coats of paint. It also works a treat on putty, stucco and plasterwork.
- 
309 WASHI-TEC® Wallpaper
 WASHI-TEC® Wallpaper removes cleanly from delicate surfaces, making it perfect for intricate jobs on wallpaper, paper and plaster.

- 
WASHI-TEC® Masker
 Easily masks surfaces for razor-sharp lines.
- 
WASHI-TEC® Multi-Masker
 A cloth and WASHI-TEC® tape rolled into one so you don't have to mask in two steps.
- 
WASHI-TEC® Cover
 Self-adhesive WASHI-TEC® paper for sharp paint lines.
- 
WASHI-TEC® Corners
 For easy and precise masking in corners.

3308 WASHI-TEC® PREMIUM PLUS

Our best product for the sharpest of paint lines.



PROPERTIES

- Very thin tape made from WASHI-TEC® paper with a high-quality acrylate adhesive
- No paint bleed
- Very flexible
- Very good adhesion and high tensile strength
- UV-resistant
- Easy to unwind

AREA OF USE

- For extremely sharp paint lines on smooth and lightly textured surfaces

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20

3808 WASHI-TEC® PREMIUM

A very good all-round tape for almost all types of covering work.



PROPERTIES

- Thin and flexible tape made from WASHI-TEC® paper with acrylate adhesive
- Good adhesion and high tensile strength
- UV-resistant

AREA OF USE

- For sharp paint lines on smooth and lightly textured surfaces

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20

3608 WASHI-TEC® STANDARD

The standard product for sharp lines.



PROPERTIES

- Thin standard masking tape made from paper with acrylate adhesive
- Good adhesion and high tensile strength
- UV-resistant

AREA OF USE

- For sharp paint lines on smooth and lightly textured surfaces

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20

3373 WASHI-TEC® EXTRA STRONG

Special fibre-reinforced tape with excellent tear resistance to meet the toughest requirements.



PROPERTIES

- Ultra-thin WASHI-TEC® paper tape with high-quality acrylate adhesive
- Highly stable and tear-resistant, fibre-reinforced tape suitable for multiple coats of paint
- UV- and moisture-resistant

AREA OF USE

- Especially suited to use on putty, stucco and plasterwork
- High adhesive strength even on rough surfaces
- Even adheres to slightly damp surfaces



Length in m	50	50	50	50
Width in mm	24	30	36	48
Sales units	36	32	24	20

309 WASHI-TEC® WALLPAPER

With a special natural rubber adhesive for extreme ease of removal from delicate surfaces.



PROPERTIES

- Lightly adhesive tape made from flexible WASHI-TEC® paper with a special natural rubber adhesive

AREA OF USE

- For demanding painting work on delicate surfaces such as wallpaper and paper
- The substrate must be sufficiently dry to prevent discolouration!

Length in m	50	50	50	50	50
Width in mm	18	24	30	36	48
Sales units	48	36	32	24	20



GET THE MEASURE OF ANY PROJECT



3688 WASHI-TEC® MASKER PREMIUM

Easy masking to produce the sharpest lines in a single step



- 3 MONTHS
- 4 WEEKS
- 100 °C
- 1,1 N/10 MM

PROPERTIES

- WASHI-TEC® adhesive tape with an environmentally friendly PE film (8 μ)
- UV-resistant
- The statically charged film automatically clings to the surface

AREA OF USE

- Fast masking and coverage in one step
- For sharp paint lines on smooth and lightly textured surfaces

Length in m	33	33	33	20
Width in mm	550	1100	1400	2700
Sales units	60	30	30	30



3888 WASHI-TEC® MASKER PREMIUM PLUS

Easy masking to produce the sharpest lines in a single step.



- 6 MONTHS
- 2 MONTHS
- 100 °C
- 1,6 N/10 MM


PROPERTIES

- WASHI-TEC® adhesive tape with an environmentally friendly PE film (9 μ)
- UV-resistant
- The statically charged film automatically clings to the surface
- Improved adhesion thanks to extremely wide adhesive tape

AREA OF USE

- Fast masking and coverage in one step
- For extremely sharp paint lines on smooth and lightly textured surfaces

Length in m	33	33	33	20
Width in mm	550	1100	1400	2700
Sales units	60	30	30	30



3377 WASHI-TEC® MASKER EXTRA STRONG

Exceptionally tear-resistant tape that easily masks surfaces in a single step



- 6 MONTHS
- 5 MONTHS
- 100 °C
- 2,1 N/10 MM

PROPERTIES

- Extremely tear-resistant WASHI-TEC® adhesive tape with eco-friendly PE film (9 μ)
- The statically charged film automatically clings to the surface
- UV- and moisture-resistant
- Improved adhesion thanks to extremely wide adhesive tape

AREA OF USE

- Especially suitable for putty, stucco and plastering work
- High adhesive strength even on rough surfaces
- Also sticks to slightly damp surfaces



Length in m	33	20
Width in mm	550	2700
Sales units	30	30



348 WASHI-TEC® MASKER WITH PAPER

Masking paper with WASHI-TEC® tape. Easily mask windowsills, skirting boards, etc. and paint the sharpest lines in a single step.




PROPERTIES

- WASHI-TEC® adhesive tape with unbleached masking paper(40 g/m²)
- UV-resistant
- Environmentally friendly

AREA OF USE

- Extremely sharp paint lines on smooth and lighty textured surfaces
- Save time when masking and covering door frames, skirting boards, windowsills and similar, and both mask and protect in a single operation

Length in m	25	25
Width in mm	180	300
Sales units	30	15



3388 WASHI-TEC® MULTI-MASKER

Fabric tape and WASHI-TEC® in one. Saves time: no pre-laying of Washi necessary!




PROPERTIES

- WASHI-TEC® and fabric tape combined with environmentally friendly PE film
- The WASHI-TEC® is designed for long-term, gentle adhesion, while the cloth tape protects against heavy wear and tear
- UV-resistant
- Film automatically attaches itself to the surface via static charge

AREA OF USE

- For covering large areas; also suitable for sensitive surfaces
- Suitable for long-term outdoor use
- Withstands even multiple paint layers

Length in m	20	20	20	17
Width in mm	550	1100	1500	2600
Sales units	60	60	40	30



396 WASHI-TEC® COVER

Self-adhesive WASHI-TEC® paper for sharp paint lines



PROPERTIES

- Tried-and-trusted WASHI-TEC® quality with JINZOKEI® fibres
- Dimensionally stable and moisture-resistant
- Easy to remove

AREA OF USE

- Especially suited to airless applications as well as delicate surfaces

Length in m	30	30	30	30
Width in mm	75	150	225	300
Sales units	27	18	9	9

308 WASHI-TEC® CORNERS

For easy and precise masking of corners.



PROPERTIES

- Self-adhesive tape for masking corners made from WASHI-TEC® paper
- UV-resistant

AREA OF USE

- For masking sharp corners
- Particularly suitable for door and window frames
- Can be used for up to 6 months indoors, also suitable for medium-term use outdoors

Length in m	50 x 50
Width in mm	60 pieces
Sales units	24



PVC AND PE PROTECTIVE TAPE

Kip® protective tapes are ideal for long-term masking for plasterwork, stucco and building protection both indoors and outdoors. Kip® protective tapes are made with a PVC or PE backing. The properties of PVC and PE also influence the properties of the Kip® protective tapes.

PVC is resistant to water, acids, alkaline solutions, alcohol, oils, petrol and salt water. Sun exposure has hardly any effect on the mechanical properties of PVC. Kip® PVC protective tapes therefore keep their shape even when subject to higher temperatures. Because it keeps its shape, it is possible to mask along straight edges. PVC tapes should be tested before use on worn plastic surfaces.

Untreated PE has a milky white colour and is naturally very elastic. PE does not react when exposed to water, solvents, acids, alkaline solutions or low temperatures. This makes the Kip® 319 PE protective tape flexible and stable when subject to either hot and cold temperatures. Its high-quality release coating further ensures it is easy to unwind and does not deform. This makes it possible to mask along straight edges.

Its good resistance to softening agents makes Kip® PE protective tape well suited for use on plastic surfaces.





315 PVC PROTECTIVE TAPE

PREMIUM PLUS

Dimensionally stable Premium Plus PVC tape.



6 WEEKS



6 WEEKS



60 °C



1,6 N/10 MM

PROPERTIES

- Smooth PVC protective tape with a natural rubber adhesive made from a very tough and flexible soft PVC film
- Keeps its shape even when subject to the effects of temperature

AREA OF USE

- For professional protection of smooth surfaces such as wood (varnished, primed), aluminium and glass
- Take care when using on weathered PVC surfaces!

Length in m	33	33	33	33
Width in mm	30	50	75	100
Colour				
Sales units	60	36	24	18



3815 PVC PROTECTIVE TAPE

PREMIUM

Sturdy PVC tape.



3 WEEKS



3 WEEKS



40 °C



1,1 N/10 MM

PROPERTIES

- PVC adhesive tape that removes without leaving residue

AREA OF USE

- For professional protection of smooth surfaces such as wood (varnished, primed), aluminium and glass
- Take care when using on weathered PVC surfaces!

Length in m	33
Width in mm	50
Colour	
Sales units	36

317 PVC PROTECTIVE TAPE EASY UNWIND PREMIUM PLUS

Easy to unwind PVC tape in Premium Plus quality.




PROPERTIES

- Made from a smooth, sturdy and flexible soft PVC film with natural rubber adhesive
- Very easy to unwind

AREA OF USE


- For professional protection of smooth surfaces
- Well suited for use on wood (varnished, primed), aluminium and glass
- Take care when using on weathered PVC surfaces!



Length in m	33	33	33
Width in mm	30	38	50
Colour			
Sales units	60	48	36

318 PVC PROTECTIVE TAPE CROSS-GROOVED PREMIUM PLUS

Cross-grooved, Premium Plus PVC tape that tears off easily and cleanly.



PROPERTIES

- Cross-grooved PVC protective tape with a natural rubber adhesive made from a very tough and flexible soft PVC film
- Excellent stability
- Tears off easily and cleanly due to its grooved surface

AREA OF USE

- For professional protection of smooth surfaces such as wood (varnished, primed), aluminium and glass
- Take care when using on weathered PVC surfaces!



Length in m	33	33	33
Width in mm	30	38	50
Colour			
Sales units	60	48	36

3817 PVC PROTECTIVE TAPE EASY UNWIND PREMIUM

Easy to unwind PVC tape.



PROPERTIES

- Smooth PVC protective tape with natural rubber adhesive made from a smooth, stable, flexible and soft standard quality PVC film
- Easy unwind


AREA OF USE

- For professional protection of smooth surfaces such as wood (varnished, primed), aluminium and glass
- Take care when using on weathered PVC surfaces!

Length in m	33
Width in mm	50
Sales units	36

3818 PVC PROTECTIVE TAPE CROSS-GROOVED PREMIUM PLUS

Cross-grooved, PVC tape that tears off easily and cleanly.



PROPERTIES

- Cross-grooved PVC protective tape with a natural rubber adhesive made from a tough and flexible standard quality soft PVC film
- Tears off easily and cleanly due to its grooved surface

AREA OF USE

- For professional protection of smooth surfaces such as wood (varnished, primed), aluminium and glass
- Take care when using on weathered PVC surfaces!

Length in m	33	33
Width in mm	30	50
Colour		
Sales units	60	36

319 3319 PE PROTECTIVE TAPE FOR PLASTIC SURFACES PREMIUM PLUS

Easy to unwind and dimensionally stable Premium Plus PE tape.

Perfectly suited to plastic surfaces.



6 WEEKS



6 WEEKS



-40 °C +60 °C



1,5 N/10 MM

PROPERTIES

- Made of environmentally friendly PE film coated on one side with a high-quality acrylate adhesive
- Easy to unwind and tear off
- Keeps its shape even when subject to hot and cold temperatures

AREA OF USE

- Perfectly suited to plastic surfaces (PVC, e.g. windows) thanks to good resistance to softening agents
- Suitable for smooth and slightly rough substrates
- Take care when using on galvanised surfaces
- Not suitable for use on anodized aluminium

319

Length in m	33	33
Width in mm	30	50
Colour		
Sales units	60	36

3319

Length in m	33	33
Width in mm	30	48
Colour		
Sales units	60	36

3819 PE PROTECTIVE TAPE FOR PLASTIC SURFACES PREMIUM

PE tape for plastic surfaces, easy to unwind.



3 WEEKS



3 WEEKS



40 °C



1,72 N/10 MM

PROPERTIES

- Protective tape with natural acrylate adhesive made of environmentally friendly PE film coated on one side
- Easy to tear off by hand
- Easy to unwind

AREA OF USE

- Perfectly suited to plastic surfaces (PVC, e.g. windows) thanks to good resistance to softening agents
- Take care when using on galvanised surfaces
- Not suitable for use on anodized aluminium

Length in m	33
Width in mm	50
Sales units	36



365 UNIVERSAL PVC PROTECTIVE TAPE

Easy to unwind,
universal PVC tape.



PROPERTIES

- Easy to unwind
- Very easy to tear off by hand
- Resistant to water and moisture
- Bonds to many surfaces, even if they are dusty or moist
- Remains supple and flexible, even at low temperatures
- Can be used indoors and outdoors thanks to good UV resistance
- High initial adhesive strength

AREA OF USE

- Repair, sealing, masking, protection, fixing tarpaulins and cover films
- Masking work on concrete, plaster, metal, plastic, insulating panels, coated kraft paper, glass wool, stone, polystyrene, etc.
- Masking during painting work
- Take care when using on weathered PVC surfaces!

Length in m	33
Width in mm	50
Sales units	36

310 DUOBAND

Premium product for
protecting structural
components and fastening
covering materials in a
single step.



PROPERTIES

- Double-sided adhesive tape made from a soft PVC film
- The adhesive strength and properties have been developed with the needs of painters and plasterers in mind

AREA OF USE

- For attaching covering materials
- Take care when using on weathered PVC surfaces!

Length in m	25	25
Width in mm	25	35
Sales units	48	48

362 FIXING TAPE REMOVABLE

Easy to unwind
PVC adhesive tape,
removable without
leaving any residue.
For securing covering
materials.



PROPERTIES

- Premium PVC tape made from flexible PVC film
- Easy to unwind
- Very stable even when subject to high and low temperatures
- Removes without leaving any residue


AREA OF USE

- For securing covering materials

Length in m	33
Width in mm	50
Sales units	36

3810 DUOBAND

Product for attaching
covering materials in a
single step.



PROPERTIES

- Double-sided adhesive tape made from a soft PVC film

AREA OF USE

- For attaching covering materials and masking off structural components such as windows and doors in a single step
- Take care when using on weathered PVC surfaces!

Length in m	25	25
Width in mm	25	35
Sales units	48	48



Thanks to the non-stick zone, the paint does not come into contact with the adhesive.

Adhesive-free zone for super easy removal of the release liner.

Front side partially coated in green.
Attach covering material to the green side.

Siliconised release liner.



DUCT TAPE

Kip® Duct tapes are made from a fabric and a PE plastic coating. Despite their high stability, Kip® Duct tapes are still easy to tear off by hand, resistant to water, oil, mechanical damage and a range of chemicals.

These universal helpers are ideal for covering plaster and stone both indoors and outdoors, for sand blasting and repair work, creating watertight seals on containers, asbestos removal and for packing goods for transport.

The fabric used influences the mechanical properties of the adhesive tape, e.g. the ease with which it can be torn off and its tensile strength. An important criterion here is the mesh specification – the distance between individual longitudinal and cross threads per square inch (1 inch = 2.54 cm). Other criteria decisive to the tape's quality are the fabric used and the strength of its threads.

326 DUCT TAPE EXTRA PREMIUM PLUS

Very flexible, tough and highly adhesive Premium Plus adhesive duct tape. For jobs where good is not good enough.



SHORT-TERM



SHORT-TERM



90 °C



5,47 N/10 MM

PROPERTIES

- Duct tape made from a 32-mesh fabric with natural rubber adhesive
- PE laminated, hence water-repellent
- Very good adhesive strength and high tensile strength

AREA OF USE

- For covering work on rough surfaces, particularly plaster and stone
- Sand blasting and repair work
- For sealing containers to make them watertight, securely packaging goods for transport and asbestos removal
- Take care when using on painted surfaces!

Length in m	50	50	50	50	50
Width in mm	25	38	48	72	100
Sales units	48	32	24	16	12

324 DUCT TAPE PREMIUM PLUS

High-quality flexible duct tape. Can also be used in low temperatures.



SHORT-TERM



SHORT-TERM



90 °C



6,13 N/10 MM

PROPERTIES

- Duct tape made from a 28-mesh fabric with natural rubber adhesive
- PE laminated, hence water-repellent
- Very good adhesive strength and high tensile strength
- Can also be used in low temperatures (-2 °C to +90 °C)

AREA OF USE

- For covering work on rough surfaces, particularly plaster and stone
- Sand blasting and repair work
- Take care when using on painted surfaces!

Length in m	50
Width in mm	48
Sales units	24

325 DUCT TAPE PREMIUM

Very good and robust general purpose duct tape with a high resistance to tearing, suitable for a variety of applications.



PROPERTIES

- Duct tape made from a 28-mesh fabric with natural rubber adhesive
- PE extruded, hence water-repellent
- Good adhesive strength and high tensile strength

AREA OF USE

- For covering work on rough surfaces, particularly plaster and stone
- Repair work, packaging, sealing, etc.
- Take care when using on painted surfaces!

Length in m	50	50
Width in mm	38	48
Sales units	32	24

3824 DUCT TAPE STANDARD

Basic duct tape for simple tasks.



PROPERTIES

- Duct tape made from a 32-mesh fabric with hot melt adhesive
- PE laminated, hence water-repellent

AREA OF USE

- For simple covering and repair work
- Take care when using on painted surfaces!

Length in m	50	50	50
Width in mm	38	50	75
Colour	■	■	■
Sales units	32	24	16

3825 DUCT TAPE PREMIUM

Good general purpose duct tape suitable for a variety of applications.



PROPERTIES

- Duct tape made from a 28-mesh fabric with natural rubber adhesive
- PE extruded, hence water-repellent
- Good adhesive strength and high tensile strength

AREA OF USE

- For covering work on rough surfaces, particularly plaster and stone
- Repair work, packaging, sealing, etc.
- Take care when using on painted surfaces!

Length in m	50
Width in mm	48
Sales units	24

3315 TAPE FOR PLASTERERS

Adhesive tape for plasterers.



PROPERTIES

- Stucco tape made from a 32-mesh fabric with rubber adhesive
- Easy to tear off
- Leaves no residue when removed
- Can be used for up to 3 weeks
- Resistant to UV and moisture

AREA OF USE

- Particularly suitable for stucco and plastering work
- Take care when using on painted surfaces!



Length in m	33	33
Width in mm	38	48
Sales units	48	36

327 DUO DUCT TAPE

Double-sided tape for easily securing covering materials on plaster and stone.



PROPERTIES

- Double-sided adhesive duct tape made from a durable, waterproof and plastic coated fabric
- Good adhesive strength
- Extremely flexible

AREA OF USE

- For covering work on rough surfaces, particularly plaster and stone
- Take care when using on painted surfaces!

Length in m	25	25
Width in mm	24	36
Sales units	48	32



364 PLASTERING TAPE EXTRA

Masking tape for stucco with very high adhesive strength for highest requirements.



PROPERTIES

- PE-laminated cloth tape made from a 27-mesh fabric with natural rubber adhesive
- Very high adhesive strength
- Easy to tear off by hand
- Can be used for up to 2 weeks
- Resistant to UV and moisture

AREA OF USE

- Particularly suitable for putty, stucco and plastering work
- Take care when using on painted surfaces!

Length in m	33
Width in mm	48
Sales units	24

CLOTH TAPE

Kip® Cloth tapes are universal adhesive tapes for long-term indoor and outdoor use, e.g. for plastering, stucco and structural protection work.

Like Kip® Duct tapes, the Kip® Cloth tapes are made from fabric with a PE plastic coating. Kip® Cloth tapes are very finely woven and therefore extremely strong. Despite this, the tapes are easy to tear by hand. Furthermore, all Kip® Cloth tapes feature a UV filter so that they can be used outdoors for longer periods.

The fabric used influences the mechanical properties of the adhesive tape, e.g. the ease with which it can be torn off and its tensile strength. An important criterion here is the mesh specification – the distance between individual longitudinal and cross threads per square inch (1 inch = 2.54 cm). Other criteria decisive to the tape's quality are the fabric used and the strength of its threads.





328 UV CLOTH TAPE EXTRA PREMIUM PLUS

UV-resistant cloth tape for long-term outdoor covering and masking work.



4 WEEKS



4 WEEKS



90 °C



5,47 N/10 MM

PROPERTIES

- Cloth tape made from a 55-mesh fabric with natural rubber adhesive
- PE extruded
- Highly UV-resistant
- Very good adhesive strength

AREA OF USE

- Can be used for a variety of indoor and outdoor covering and masking tasks, even on high-quality surfaces.
- The PE layer enables longer usage than conventional cloth tapes

Length in m	25	25	25	25	25
Width in mm	18	24	30	36	48
Sales units	64	48	42	32	24

329 UV CLOTH TAPE PREMIUM

UV-resistant cloth tape for outdoor covering and masking work.



3 WEEKS



3 WEEKS



40 °C



3 N/10 MM

PROPERTIES

- Cloth tape made from a 42-mesh fabric with natural rubber adhesive
- PE laminated
- UV-resistant

AREA OF USE

- Can be used for a variety of covering and masking tasks on common surfaces

Length in m	25	25
Width in mm	38	50
Sales units	48	30



3829 UV CLOTH TAPE STANDARD

Strong cloth tape for outdoor covering and masking work.



3,32 N/10 MM

PROPERTIES

- Fabric tape made from a 59-mesh fabric with natural rubber adhesive
- PE laminated
- UV-resistant


AREA OF USE

- Can be used for a variety of covering and masking tasks on common surface types

Length in m	25	25	25	50	50
Width in mm	30	38	50	38	50
Colour	Blue	Blue	Red	Blue	Blue
Sales units	42	48	30	32	24

380 FINELINE TAPE FABRIC

For sharp edges where a sturdy backing is required, such as plastering and stucco work.



2,4 N/10 MM

PROPERTIES

- Very thin, flexible cloth tape
- With integrated UV filter on a PE laminated polyester mesh with acrylate adhesive
- Easy to unwind
- Easy to tear off

AREA OF USE

- Masking for creating sharp lines when performing painting, plastering and stucco work on nearly all smooth and lightly textured surfaces such as stone
- Also highly suited in projects where several coatings are required



Length in m	50	50	50	50
Width in mm	25	30	38	50
Sales units	60	48	36	30

358 CONCRETE AND BRICKWORK TAPE

Flexible and UV-resistant cloth tape for use on rough outdoor surfaces.



3,7 N/10 MM

PROPERTIES

- Cloth tape made from a 32-mesh fabric with natural rubber adhesive
- PE laminated, hence water-repellent
- Very good initial adhesive strength, therefore ideal for rough surfaces
- UV-resistant
- Can also be used at low temperatures

AREA OF USE

- For covering work on rough surfaces, particularly stone and concrete
- Sand blasting and repair work

Length in m	50
Width in mm	44
Sales units	24



359 INDUSTRIAL CLOTH TAPE

Premium cloth tape
For repair and construction work in industry and trade.



PROPERTIES

- Cloth tape made from a 34-mesh fabric with natural rubber adhesive
- PE laminated, hence water-repellent
- Very good adhesive strength and high tensile strength
- Good temperature resistance up to 90 °C

AREA OF USE

- Can be used for a variety of industrial and trade repair and structural works
- Create waterproof seals on containers



Length in m	50
Width in mm	50
Sales units	24

3325 CLOTH TAPE

For asbestos removal and general sealing, bundling, masking and protection.



PROPERTIES

- Fabric tape with high-quality natural rubber adhesive
- Easy to unwind
- High initial adhesive strength, ideal for rough surfaces
- Very good adhesion on stone and films
- PE-laminated to repel water
- Can also be used at low temperatures
- Excellent flexibility

AREA OF USE

- For masking work on rough surfaces, particularly plaster and stone
- Bonding polyethylene cladding during asbestos removal measures
- Airtight masking of join between gloves and overalls
- Airtight sealing of asbestos bags, films and containers
- Sealing of double glazing units or pipeline seals
- Joining carpets together

Length in m	50	50
Width in mm	48	72
Sales units	24	16



323 GAFFER'S TAPE

Non-reflective cloth tape for use in stage construction, theatres, etc.



PROPERTIES

- Cloth tape made from a 77-mesh fabric with non-reflective PE lamination
- Specially designed for use in stage construction
- Good adhesive strength and easy to remove
- Available in a wide range of colours

AREA OF USE

- For masking, fastening, etc. in places where non-reflective tape is required such as the entertainment industry, stage construction, theatres, concerts, conferences, etc.

Length in m	50	50	50
Width in mm	38	50	100
Colour	White	Black	Black
Sales units	24	24	12

LARGE-SCALE PROTECTION

Our outstanding Kip® Masker, Kip® Protective films, Mask, Masking papers and -films make it possible to quickly and effectively mask and cover edges, beams, cornices and large surfaces in one single step. This allows you to achieve the best possible results quickly and efficiently.

Kip® Maskers are perfect for use with Kip® Duoband or Kip® Duo duct tape. Simply attach the Kip® Duoband on the left and right sides of windows, doors and other structural elements. Then apply the Kip® Masker on top, unfold the film and affix to the doubled adhesive side of the Kip® Duoband. Simply paint over for clean and sharp paint lines and surfaces.



332 MASKING-TEC® MASKER PREMIUM PLUS

Professional Masker with Premium Plus masking tape for quickly and easily masking surfaces.



7 DAYS



SHORT-TERM



90 °C



4,26 N/10 MM

PROPERTIES

- High-quality Kip® Masking tape with environmentally friendly PE film
- This film attaches itself to the substrate through static charging
- Also available in a dispenser

AREA OF USE

- For quickly and fully covering and masking large surface areas (e.g. walls, windows, furniture)
- Can be used on almost all indoor surfaces

550 and 2700 mm also available in a dispenser



For film width up to 1100mm:
15 mm 10 μ

For film width from 1600mm:
18 mm 10 μ

Length in m	33	33	33	33	33	20
Width in mm	300	550	1100	1600	1800	2700
Sales units	60	60	30	30	30	30

3832 MASKING-TEC® MASKER PREMIUM

Masker with Premium masking tape. For a variety of covering applications.



4 DAYS



60 °C



3,92 N/10 MM

PROPERTIES

- General purpose Kip® Masking tape with environmentally friendly PE film
- This film attaches itself to the substrate through static charging

AREA OF USE

- For quickly and fully covering and masking large surface areas (e.g. walls, windows, furniture)
- Can be used on almost all indoor surfaces

For film width 550mm, 1100mm, 1400mm:

15 mm 9 μ

For film width 1800mm, 2700mm:

18 mm 9 μ

Length in m	33	33	33	33	20
Width in mm	550	1100	1400	1800	2700
Sales units	60	30	30	30	30

3888 WASHI-TEC® MASKER PREMIUM PLUS

Easy masking to produce the sharpest lines in a single step.



6 MONTHS



2 MONTHS



100 °C



1,6 N/10 MM


PROPERTIES

- WASHI-TEC® adhesive tape with an environmentally friendly PE film (9 µ)
- UV-resistant
- The statically charged film automatically clings to the surface
- Improved adhesion thanks to extremely wide adhesive tape

AREA OF USE

- Fast masking and coverage in one step
- For extremely sharp paint lines on smooth and lightly textured surfaces

Length in m	33	33	33	20
Width in mm	550	1100	1400	2700
Sales units	60	30	30	30



348 WASHI-TEC® MASKER WITH PAPER

Masking paper with WASHI-TEC® tape. Easily mask windowsills, skirting boards, etc. and paint the sharpest lines in a single step.



3 MONTHS





100 °C



1,1 N/10 MM


PROPERTIES

- WASHI-TEC® adhesive tape with unbleached masking paper (40 g/m²)
- UV-resistant
- Environmentally friendly

AREA OF USE

- Extremely sharp paint lines on smooth and lightly textured surfaces
- Save time when masking and covering door frames, skirting boards, windowsills and similar, and both mask and protect in a single operation

Length in m	25	25
Width in mm	180	300
Sales units	30	15



3688 WASHI-TEC® MASKER PREMIUM

Easy masking to produce the sharpest lines in a single step.



3 MONTHS



4 WEEKS



100 °C



1,1 N/10 MM

PROPERTIES

- WASHI-TEC® adhesive tape with an environmentally friendly PE film (8 µ)
- UV-resistant
- The statically charged film automatically clings to the surface

AREA OF USE

- Fast masking and coverage in one step
- For sharp paint lines on smooth and lightly textured surfaces

Length in m	33	33	33	20
Width in mm	550	1100	1400	2700
Sales units	60	30	30	30



KIP® DUOBAND
PREMIUM PRODUCT FOR EASY FASTENING OF COVERING MATERIALS IN A SINGLE STEP.
PAGE 40



334 MASKING-TEC® MASKER WITH PAPER

Masking paper with Premium masking tape. For quickly masking windowsills, skirting boards, etc.




PROPERTIES

- High-quality Premium Kip® Masking tape with unbleached masking paper (40 g/m²)
- Environmentally friendly

AREA OF USE

- Save time when masking and covering door frames, skirting boards, windowsills and similar, and both mask and protect in a single operation
- Can be used on almost all indoor surfaces

Length in m	25	25	25
Width in mm	100	180	300
Sales units	30	30	15



3377 WASHI-TEC® MASKER EXTRA STRONG

Exceptionally tear-resistant tape that easily masks surfaces in a single step



PROPERTIES

- Extremely tear-resistant WASHI-TEC® adhesive tape with eco-friendly PE film (9 μ)
- The statically charged film automatically clings to the surface
- UV- and moisture-resistant
- Improved adhesion thanks to extremely wide adhesive tape

AREA OF USE

- Especially suitable for putty, stucco and plastering work
- High adhesive strength even on rough surfaces
- Also sticks to slightly damp surfaces



EXTRA TEAR RESISTANCE

Length in m	33	20
Width in mm	550	2700
Sales units	30	30



3834 MASKING-TEC® MASKER WITH PAPER

Masking paper with high-quality masking tape. For quickly masking windowsills, skirting boards, etc.




PROPERTIES

- MASKING-TEC® tape with unbleached masking paper (35 g/m²)
- Environmentally friendly

AREA OF USE

- Saves time when masking and covering door frames, skirting boards, windowsills and similar, and both mask and protect in a single operation
- Can be used on almost all indoor surfaces

Length in m	25	25	25
Width in mm	100	180	300
Sales units	30	30	15





KIP® DUOBAND
PREMIUM PRODUCT FOR
EASY FASTENING OF COVERING
MATERIALS IN A SINGLE STEP.
PAGE 40

333 MASKER WITH CLOTH TAPE PREMIUM PLUS

Masker with high-quality cloth tape.
For quickly masking a variety of surfaces.



- 3 WEEKS
- 3 WEEKS
- 40 °C
- 3,14 N/10 MM


PROPERTIES

- High-quality blue cloth tape with environmentally friendly PE film
- This film attaches itself to the substrate through static charging
- UV-resistant

AREA OF USE

- For quickly covering and masking large surface areas (e.g. windows)
- Can be used on many different surfaces both indoors and outdoors

Length in m	20	20	20	20	20	20	17
Width in mm	300	550	1100	1500	1800	2100	2700
Sales units	60	60	60	40	40	40	30



383 MASKER WITH CLOTH TAPE EXTRA PREMIUM PLUS

Masker with Premium cloth tape.
For long-term masking a variety of surfaces.



- 4 WEEKS
- 4 WEEKS
- 90 °C
- 5,47 N/10 MM


PROPERTIES

- Very high-quality light grey cloth tape with environmentally friendly PE film
- High UV resistance
- This film attaches itself to the substrate through static charging

AREA OF USE

- Quickly and completely cover and mask large surface areas (e.g. windows)
- Can be used on many different surfaces both indoors and outdoors

Length in m	20	20	20	20	20
Width in mm	550	1100	1500	1800	2100
Sales units	60	40	40	40	40



3833 MASKER WITH CLOTH TAPE PREMIUM

Masker with Premium cloth tape.



- 10 DAYS
- 10 DAYS
- 30 °C
- 4,5 N/10 MM


PROPERTIES

- Cloth tape with environmentally friendly PE film
- This film attaches itself to the substrate through static charging

AREA OF USE

- For completely covering and masking large surface areas (e.g. windows)
- Can be used on many different surfaces both indoors and outdoors

Length in m	20	20	20	20	17
Width in mm	550	1100	1500	1800	2600
Sales units	60	30	40	40	40



384 STUCCO MASKER

Masker with extra-wide cloth tape and a thick HDPE film.
For masking on plaster and stone surfaces.



PROPERTIES

- Blue, extra-wide (30 mm) cloth tape with strong HDPE film (20 μ)
- Very good adhesive strength
- This film attaches itself to the substrate through static charging

AREA OF USE


- For quickly and completely covering and masking large surface areas
Primarily designed for working on e.g. plaster, stone and concrete
- Can be used on many different surfaces both indoors and outdoors

Length in m	18	18	18	18
Width in mm	550	1100	1600	2400
Sales units	60	40	30	20



385 WINDOW-MASKER

A clear view even after masking!
For long-term masking of windows.



PROPERTIES

- Very high-quality cloth tape with 30 μ thick and highly transparent LDPE construction film
- High UV resistance

AREA OF USE

- For masking windows when a clear view is required (e.g. in offices)
- Take care when using on weathered PVC surfaces!

Length in m	20
Width in mm	1600
Sales units	20



3388 WASHI-TEC® MULTI-MASKER

Fabric tape and WASHI-TEC® in one.
Saves time:
no pre-laying of Washi necessary!



PROPERTIES

- WASHI-TEC® and fabric tape combined with environmentally friendly PE film
- The WASHI-TEC® is designed for long-term, gentle adhesion, while the cloth tape protects against heavy wear and tear
- UV-resistant
- Film automatically attaches itself to the surface via static charge

AREA OF USE

- For covering large areas; also suitable for sensitive surfaces
- Suitable for long-term outdoor use
- Withstands even multiple paint layers

Length in m	20	20	20	17
Width in mm	550	1100	1500	2600
Sales units	60	60	40	30






313 PROTECTIVE FILM PREMIUM PLUS

For long-term protection during a variety of tasks.

Entirely self-adhesive and therefore easy to affix.

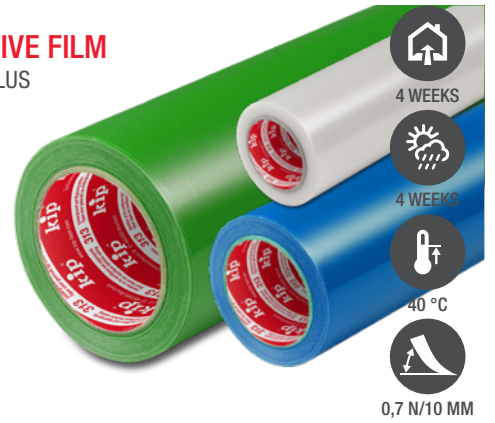

4 WEEKS



4 WEEKS



40 °C



0,7 N/10 MM

PROPERTIES

- Entirely self-adhesive with very good adhesive strength
- Tough LDPE film (50 µ)
- Available in green, transparent and blue


AREA OF USE

- Provides professional protection for painting, plastering and facade cleaning work
- Can be used on glass surfaces, stone and carpeted floors as well as stairs
- Take care when using on porous surfaces such as marble and natural stone, terracotta and weathered PVC surfaces!

Length in m	100	100	100	100	100
Width in mm	75	125	250	500	1000
Colour	Green	Green	Green	Blue	Blue
Sales units	36	24	12	6	6

3813 PROTECTIVE FILM PREMIUM

Entirely self-adhesive film for a range of short-term covering work.

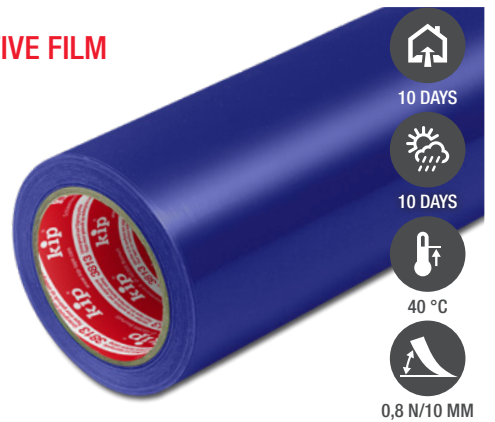

10 DAYS



10 DAYS



40 °C



0,8 N/10 MM

PROPERTIES

- Entirely self-adhesive
- Standard LDPE film (37 µ)
- Available in blue

AREA OF USE

- Provides protection for painting, plastering and facade cleaning work
- Can be used on glass surfaces, stone and carpeted floors as well as stairs
- Take care when using on porous surfaces such as marble and natural stone, terracotta and weathered PVC surfaces!

Length in m	100	100	100	100
Width in mm	250	500	750	1000
Sales units	12	6	3	6

357 CARPET PROTECTION FILM

For longer-term covering of carpeted floors.

Easy to unroll due to the adhesive's location on the outside.



4 WEEKS



4 WEEKS



45 °C



1,8 N/10 MM

PROPERTIES

- Entirely self-adhesive with very good adhesive strength
- Very tough LDPE film (80 μ)
- Easy to unroll due to the adhesive's location on the outside

AREA OF USE

- This film is suitable for protecting carpeted floors against mechanical damage and dirt during plastering, painting and construction work

Length in m	60
Width in mm	700
Sales units	6



322 FOIL-MASK

Transparent, 50 μ thick LDPE film with two adhesive strips.

For easily masking beams and door frames, etc.



1 WEEK



1 WEEK



60 °C



2,2 N/10 MM

PROPERTIES

- Environmentally friendly, 50 μ thick LDPE film with 2 adhesive edges

AREA OF USE

- Save time when masking and covering beams, door frames, windowsills, etc.
- Sturdy adhesive edges for ensuring precision placement

Length in m	50	50	50
Width in mm	195	300	500
Sales units	30	12	12



3813

353 FLEX-MASK®

Continuously extendible film for the quick coverage and protection of window and door surfaces.



-  3 WEEKS
-  3 WEEKS
-  40 °C
-  2,4 N/10 MM


PROPERTIES

- Self-adhesive strip on top and bottom edge for exact positioning
- Can be applied by a single person
- High tear resistance
- 40 µ thick

AREA OF USE

- Can be pulled out to all commonly encountered window widths and heights
- Suitable for outdoor and indoor use

Length in m	25
Width in mm	1200
Sales units	4

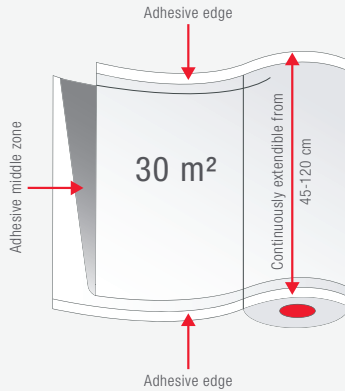

KIP® 353 FLEX-MASK® COVERAGE VARIANT: VERTICAL:



1 Pull the Flex-Mask® vertically upwards, affix using the adhesive strips on the sides and cut to desired length at the bottom.



2 Pull out the foil towards the left and affix using the adhesive strips.



3 Pull out the foil towards the right and affix using the adhesive strips. Finally, press the adhesive middle zone onto the window pane.

KIP® 353 FLEX-MASK® COVERAGE VARIANT: HORIZONTAL:



1 Affix the Flex-Mask® using both adhesive strips, then roll out towards the right, cut to the desired length and affix in place.



2 Pull the foil out upwards and affix using the adhesive strips.



3 Pull the foil out downwards and affix using the adhesive strips. Finally, press the adhesive middle zone onto the window pane.

336 MASKING PAPER

High-quality smooth painters covering paper for Kip® Ready-Masker 335.



AREA OF USE

- Reliable protection for painting, stucco and plastering work using the Kip® Ready-Masker
- Made from 50g/m² paper

**MATCHING
READY-MASKER
ON PAGE 73**

331 MASKING PAPER

High-quality smooth painters covering paper for dispenser 330.



AREA OF USE

- Reliable protection for painting, stucco and plastering work using dispenser 330
- Made from 50g/m² recycled paper

**MATCHING
DISPENSER
ON PAGE 73**

KIP® 331 MASKING PAPER FOR DISPENSER 330.

	331-00
Length in m	350
Width in mm	220
Sales units	1

KIP® 331 MASKING PAPER

	331-38	331-60
Length in m	300	300
Width in mm	375	600
Sales units	1	1

Length in m	50	50	50	50	50
Width in mm	75	150	225	300	450
Sales units	60	12	12	12	12

OUR RANGE OF COVERS, TARPAULINS AND FILMS:

Item	Thick-ness	Material	Dimensions
350-00 Tarpaulin	10 μ	HDPE	4 m x 5 m
350-01 Tarpaulin	10 μ	HDPE	4 m x 12,5 m
351-00 Professional tarpaulin	18 μ	HDPE	4 m x 5 m
351-01 Professional tarpaulin	18 μ	HDPE	4 m x 12,5 m
352-00 Construction cover sheet	50 μ	LDPE	4 m x 5 m
355-10 Covering sheet	30 μ	LDPE	2 m x 50 m
355-50 Covering sheet	7 μ	HDPE	2 m x 100 m



TAPE FOR NEW BUILDS, EXTENSIONS AND RENOVATIONS

On the following pages you will find our extensive range of special tapes for a wide range of applications in new builds, renovation work and interior extension projects.

- Our jointing tapes are suitable for masking over joints before filling.
- Kip® Carpet tapes are suitable for permanently laying different types of carpets, tiles and other flooring materials such as linoleum. Our Kip® Trade fair carpet tape, on the other hand, is designed for installing temporary floor coverings for use during trade shows, exhibitions and other events.
- Kip® Aluminium tapes are available as insulation tape made from pure aluminium or as insulation tape with an aluminium coated PP film. Both insulation tapes are ideal aids for installing insulation, heating and ventilation systems, etc.
- The adhesive and non-adhesive Kip® Warning tapes are ideal for marking out and securing all kinds of areas.
- The Kip® 347 Series tapes are a complete package of adhesive tapes and a sealing compound for creating professional EnEV moisture seals.





343 JOINTING TAPE PREMIUM PLUS

Premium Plus fibreglass-reinforced cloth tape for masking over joints before filling.



PROPERTIES

- Self-adhesive fibreglass-reinforced cloth tape with rough 20-mesh structure
- Easy to affix
- Alkali-resistant

AREA OF USE

- For masking joints between plasterboards or covering holes and cracks in walls before filling or plastering

Length in m	90	90
Width in mm	48	96
Sales units	24	12

3843 JOINTING TAPE PREMIUM

Fibreglass-reinforced cloth tape for masking over joints before filling.



PROPERTIES

- Self-adhesive fibreglass-reinforced cloth tape with rough 18-mesh structure
- Easy to affix
- Alkali-resistant

AREA OF USE

- For masking joints between plasterboards or covering holes and cracks in walls before filling or plastering

Length in m	90	90
Width in mm	48	96
Sales units	24	12

366 FIBREGLASS STRIPS

Paperless, non-adhesive joint tape for plasterboard joints and repairs.



PROPERTIES

- Paperless, matt, non-adhesive joint tape in premium quality

AREA OF USE

- For plasterboard joints/ends and for repairing cracks on walls and ceilings

Length in m	25
Width in mm	50
Sales units	40

342 FABRIC CARPET TAPE PREMIUM

Premium carpet tape for permanent fixing of floor coverings.



PROPERTIES

- Double-sided and tough cloth tape with a thickness of 0.22 mm
- Largely resistant to plasticisers
- Good adhesive and high tensile strength

AREA OF USE

- For professional permanent installation of carpets, carpet tiles, etc.
- Quick and reliable to use

Length in m	25	25
Width in mm	38	50
Sales units	36	30



338 MOUNTING TAPE FOR MIRRORS

Installation tape for indoor use. For permanently mounting mirrors and other objects.



PROPERTIES

- Double-sided adhesive mirror tape made from polyethylene foam
- Extra-strong adhesive power
- Moisture-resistant

AREA OF USE

- For permanently mounting mirrors and other flat objects
- Good adhesion to smooth surfaces such as tiles, metal, glass and ceramic

Length in m	5
Width in mm	19
Sales units	52

341 FILM CARPET TAPE

For permanently securing floor coverings.



PROPERTIES

- Double-sided adhesive foil tape with a thickness of 0.11 mm
- Good adhesive and high tensile strength
- Easy to tear off by hand

AREA OF USE

- For permanently securing carpets, carpet tiles, etc.
- Easy to use

Length in m	25	25
Width in mm	38	50
Sales units	36	30

389 TRADE FAIR CONSTRUCTION CARPET TAPE

Removable carpet tape.
For temporary installation of floor coverings at exhibitions and events.



PROPERTIES

- Removable, double-sided and tough cloth tape with a thickness of 0.31 mm
- Prevents the covering from moving and crumpling

AREA OF USE

- Particularly suitable for temporary installation of floor coverings at exhibitions, conferences, etc.
- Also suitable for areas of heavy use
- Quick and reliable to use

Length in m	25	25	25
Width in mm	19	38	50
Sales units	60	30	24

337 SKIRTING BOARD TAPE

For attaching floor coverings to skirting boards.



PROPERTIES

- Double-sided adhesive cloth tape
- High adhesive and tensile strength

AREA OF USE

- For quickly attaching floor coverings to skirting boards

Length in m	25	50
Width in mm	38	50
Sales units	16	12



345 ALUMINIUM TAPE

Pure aluminium tape for insulation and installation work on heating and ventilation systems, etc.



PROPERTIES

- Made from pure aluminium (30 µ)
- Very good adhesive strength
- Highly fire resistant in accordance with DIN-4102-B1

AREA OF USE

- For aluminium laminated insulation boards
- For wrapping aluminium laminated pipe insulation
- For installing heating, ventilation and air conditioning systems

Length in m	50
Width in mm	50
Sales units	24

3845 ALUMINIUM TAPE

Pure aluminium tape for insulation and installation work on heating and ventilation systems, etc.



PROPERTIES

- Made from pure aluminium (30 µ)
- Very good adhesive strength


AREA OF USE

- For aluminium laminated insulation boards
- For wrapping aluminium laminated pipe insulation
- For installing heating, ventilation and air conditioning systems

Length in m	50	50	50
Width in mm	48	72	96
Sales units	24	16	12

344 PP ALUMINIUM TAPE

Aluminium coated PP tape for insulation and installation work on heating and ventilation systems, etc.



PROPERTIES

- Made from aluminium coated PP film
- Good adhesive strength

AREA OF USE

- For aluminium laminated insulation boards
- For wrapping aluminium laminated pipe insulation
- For installing heating, ventilation and air conditioning systems

Length in m	50	50
Width in mm	50	75
Sales units	96	64

339 PVC WARNING TAPE

Self-adhesive warning tape. For marking dangerous areas.



PROPERTIES

- Available in white/red and yellow/black
- Points right horizontally
- Adhesive on one side
- Easy to unwind


AREA OF USE

- For marking dangerous areas, safety zones and obstacles

Length in m	66	66	66	66
Width in mm	50	50	60	60
Colour				
Item no.	339-53	339-54	339-55	339-56
Sales units	36	36	30	30

339 PVC WARNING TAPE EXTRA

Very tough, self-adhesive warning tape.
For marking heavily used dangerous areas (e.g. steps).

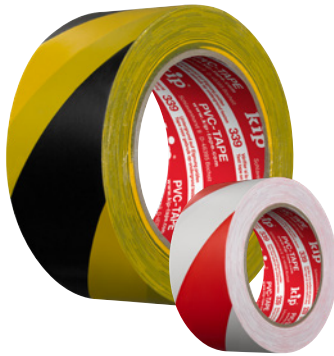


PROPERTIES

- 170 µ thick premium quality PVC warning tape
- Available in white/red and yellow/black
- Points left horizontally
- Adhesive on one side
- Easy to unwind

AREA OF USE

- For marking heavily used dangerous areas, safety zones and obstacles such as, e.g., steps, etc.



Length in m	33	33	33
Width in mm	50	50	75
Colour			
Item no.	339-57	339-58	339-59
Sales units	36	36	24

3824 CLOTH WARNING TAPE

Basic duct tape for marking heavily used dangerous areas (e.g. steps).



PROPERTIES

- Fabric tape made from a 32-mesh fabric with hot melt adhesive
- PE-laminated to repel water
- Available in yellow/black
- Points left horizontally
- Adhesive on one side

AREA OF USE

- For marking dangerous areas, safety zones and obstacles
- Take care when using on painted surfaces!

Length in m	33
Width in mm	48
Colour	
Sales units	36

391 BLOCKING TAPE

White/red non-adhesive barrier tape.
For marking, securing and cordoning off hazardous areas.



PROPERTIES

- Non-adhesive white/red barrier tape made from a high-quality polyethylene film

AREA OF USE

- For securing, marking and cordoning off hazardous areas, safety zones and obstacles

Length in m	500
Width in mm	80
Sales units	1



347 BARRIER-TAPE FLEX

For permanent, airtight masking of vapour barriers in accordance with EnEV and DIN 4108-7 at points of permeation.



PROPERTIES

- Single-sided adhesive roof extension tape made from reinforced and highly flexible HDPE film
- Fibre-reinforced
- Very high adhesive strength on a variety of surfaces even at low temperatures thanks to thick adhesive layer

- Even sticks to slightly damp surfaces (e.g. damp from condensation)
- UV- and temperature resistant
- Very stable over time
- With end grip for greater ease of use

AREA OF USE

- For permanent, airtight masking of vapour barriers in accordance with EnEV and DIN 4108-7 at points of permeation such as pipes, chimneys, rafters, (roof) windows and other elements

Length in m	25
Width in mm	60
Sales units	10

347 CONSTRUC-TAPE CONNECT

For permanent, airtight taping of vapour barriers in accordance with EnEV and DIN 4108-7 at overlaps.



PROPERTIES

- Single-sided adhesive roof extension tape made from special moisture-resistant paper; hence effectively prevents moisture from penetrating at joints
- Easy to tear by hand
- Very high adhesive strength even at low temperatures due to thick adhesive layer

- Even sticks to slightly damp surfaces (e.g. damp from condensation)
- UV- and temperature resistant
- Very stable over time


AREA OF USE

- For creating permanent, airtight moisture and vapour barriers and sticking to OSB composite board in accordance with EnEV and DIN 4108-7 at overlaps.
- Suitable for all common vapour barriers

Length in m	40
Width in mm	60
Sales units	5

347 SEAL-TAPE UV-RESISTANT

For permanent airtight and watertight seals on outdoor sarking and facing membranes.



PROPERTIES

- Single-sided adhesive loft tape made from LDPE film with diagonal scrim
- Very high adhesive strength on a variety of surfaces even at low temperatures thanks to thick adhesive layer

- Even sticks to surfaces such as PE and PP films, non-woven plastics and slightly damp surfaces (e.g. damp from condensation)
- UV stable

AREA OF USE

- For creating permanent airtight and watertight seals on outdoor sarking and facing membranes

Length in m	25
Width in mm	60
Sales units	10

347 VAPOUR BARRIER SEALANT

For creating moisture seals around joints in areas such as walls, etc. according to EnEV and DIN 4108-7.



PROPERTIES

- Self-adhesive, permanently elastic sealing compound
- Can be worked with at temperatures as low as -5 °C, resistant to freezing up to -30 °C
- Good resistance to weathering and moisture
- Adheres well to many surfaces including slightly dusty or damp surfaces

AREA OF USE

- Sealing compound for creating airtight moisture barriers according to EnEV and DIN 4108-7
- For creating moisture barriers at joints, connections between structural elements and overlaps

Contents	310 ml
V.E	20

IMPORTANT INFORMATION ABOUT KIP® LOFT CONVERSION TAPES

MOISTURE AND ADHESION

A dry, dust-free and grease-free surface is essential for good adhesion. However, building work goes on all year round and in a variety of different weather conditions – all of which an adhesive must be able to withstand. Once an adhesive is in place, there are a number of other processes that also generate plenty of moisture such as condensation, breathing, showering, cooking, etc.

That's why Kip® Construc-Tape is made from a special moisture-resistant paper that stops any moisture getting into the edges of joints. The acrylate adhesive used by our Construc-, Barrier- and Seal-tape can also absorb moisture and release it again. Our loft conversion tapes can therefore also be placed onto slightly damp surface with guaranteed adhesion that can cope with normal household activities.


TEMPERATURES AND ADHESION

Kip® loft conversion tapes can also be used in minus temperatures. Please note, however, that the adhesive tape should only be applied at temperatures between approx. 18 °C and 25 °C.

If the rolls of tape get too cold, then their adhesive strength may drop and the adhesive become more brittle. For this reason, rolls of adhesive tape should not be kept in empty buildings or company vehicles, etc. during the winter, but stored at room temperature.

SURFACES AND ADHESION


Adhesives are used throughout the construction industry on a huge variety of different surfaces (e.g. wood, plaster, stone, concrete, plastic), each with a different surface structure and adhesive properties. When working with textured surfaces, it is important that the adhesive can penetrate into the deep recesses in order to increase the contact area between the adhesive and the surface (make sure to firmly press down on the tape). Only then is reliable adhesion assured. It is for this reason that the Kip® loft conversion tapes have a very thick adhesive layer.

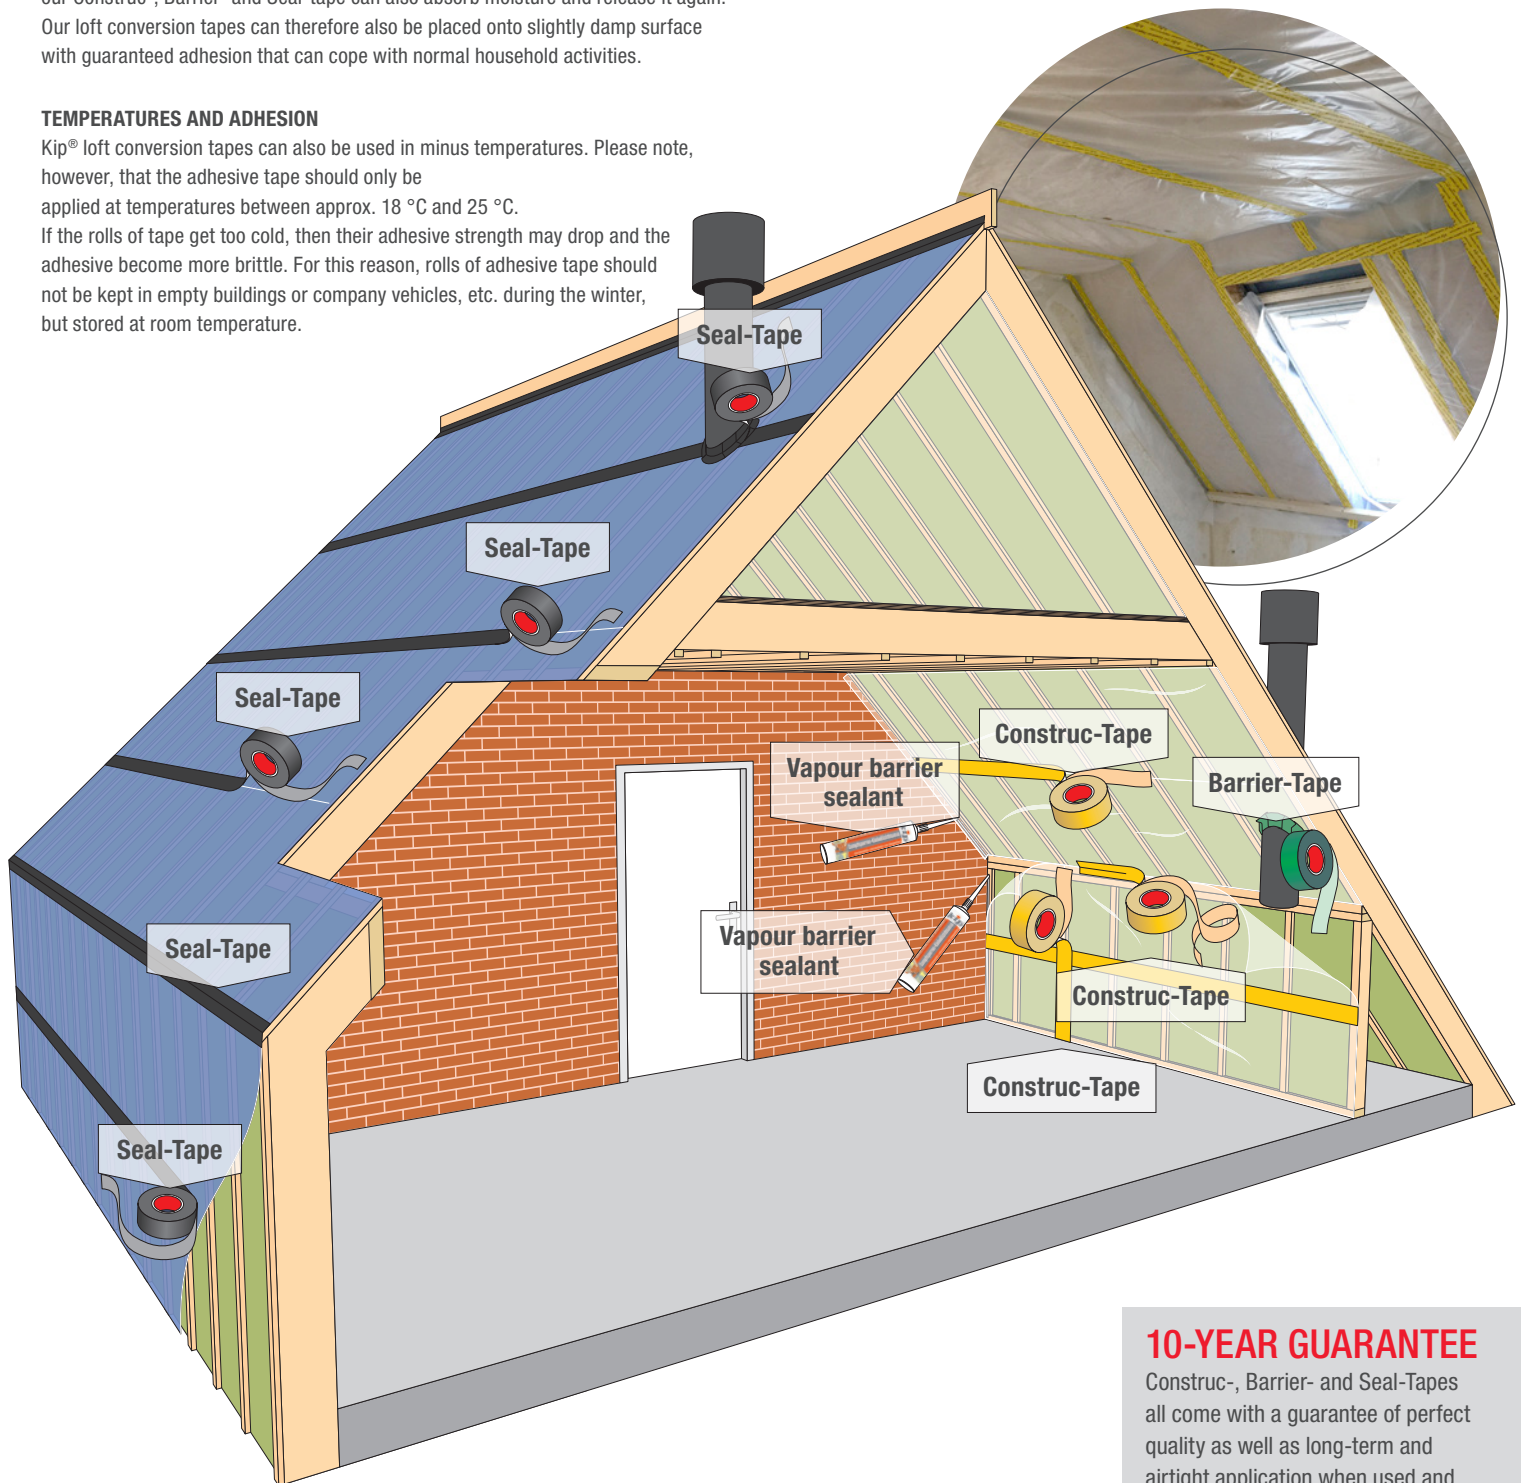


10-YEAR GUARANTEE
Construc-, Barrier- and Seal-Tapes all come with a guarantee of perfect quality as well as long-term and airtight application when used and laid properly.

PACKAGING TAPE

Our range of Kip® Packaging tapes guarantee a reliable seal for your packages and offer an easy way to secure items for transport. Both heavy and lightweight goods, valuable and fragile contents: our adhesive tapes will help to ensure your items are secure.

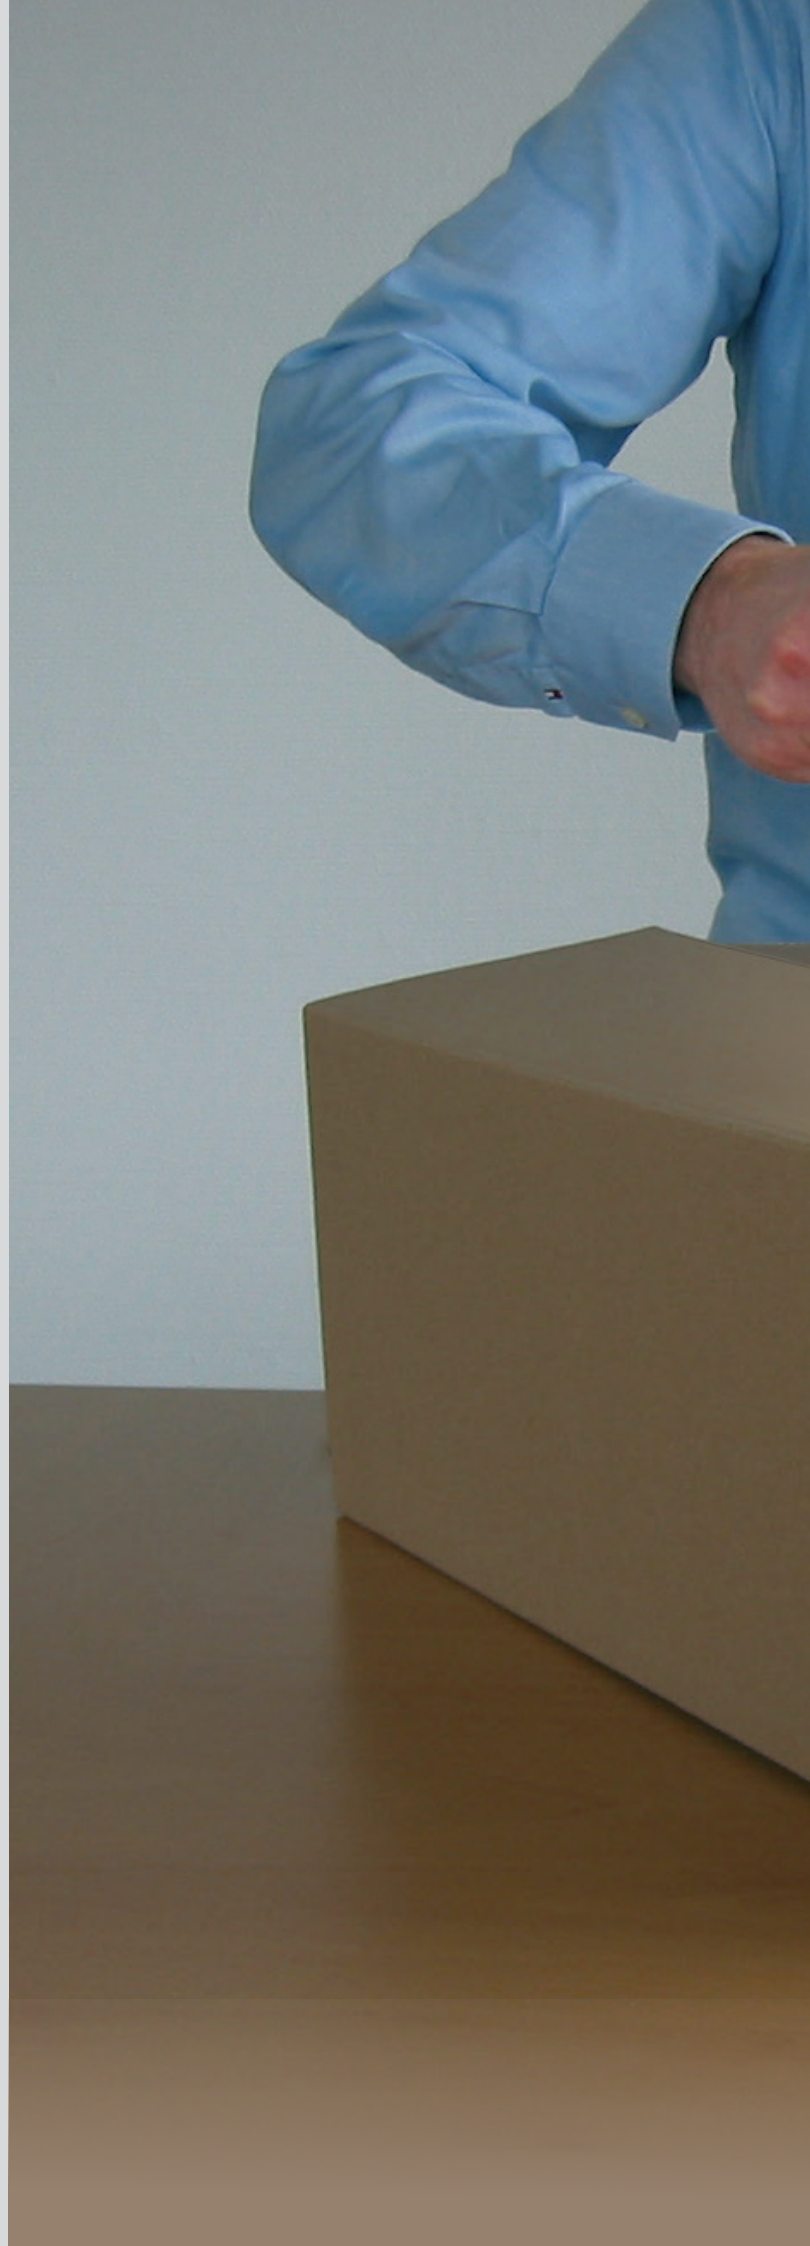

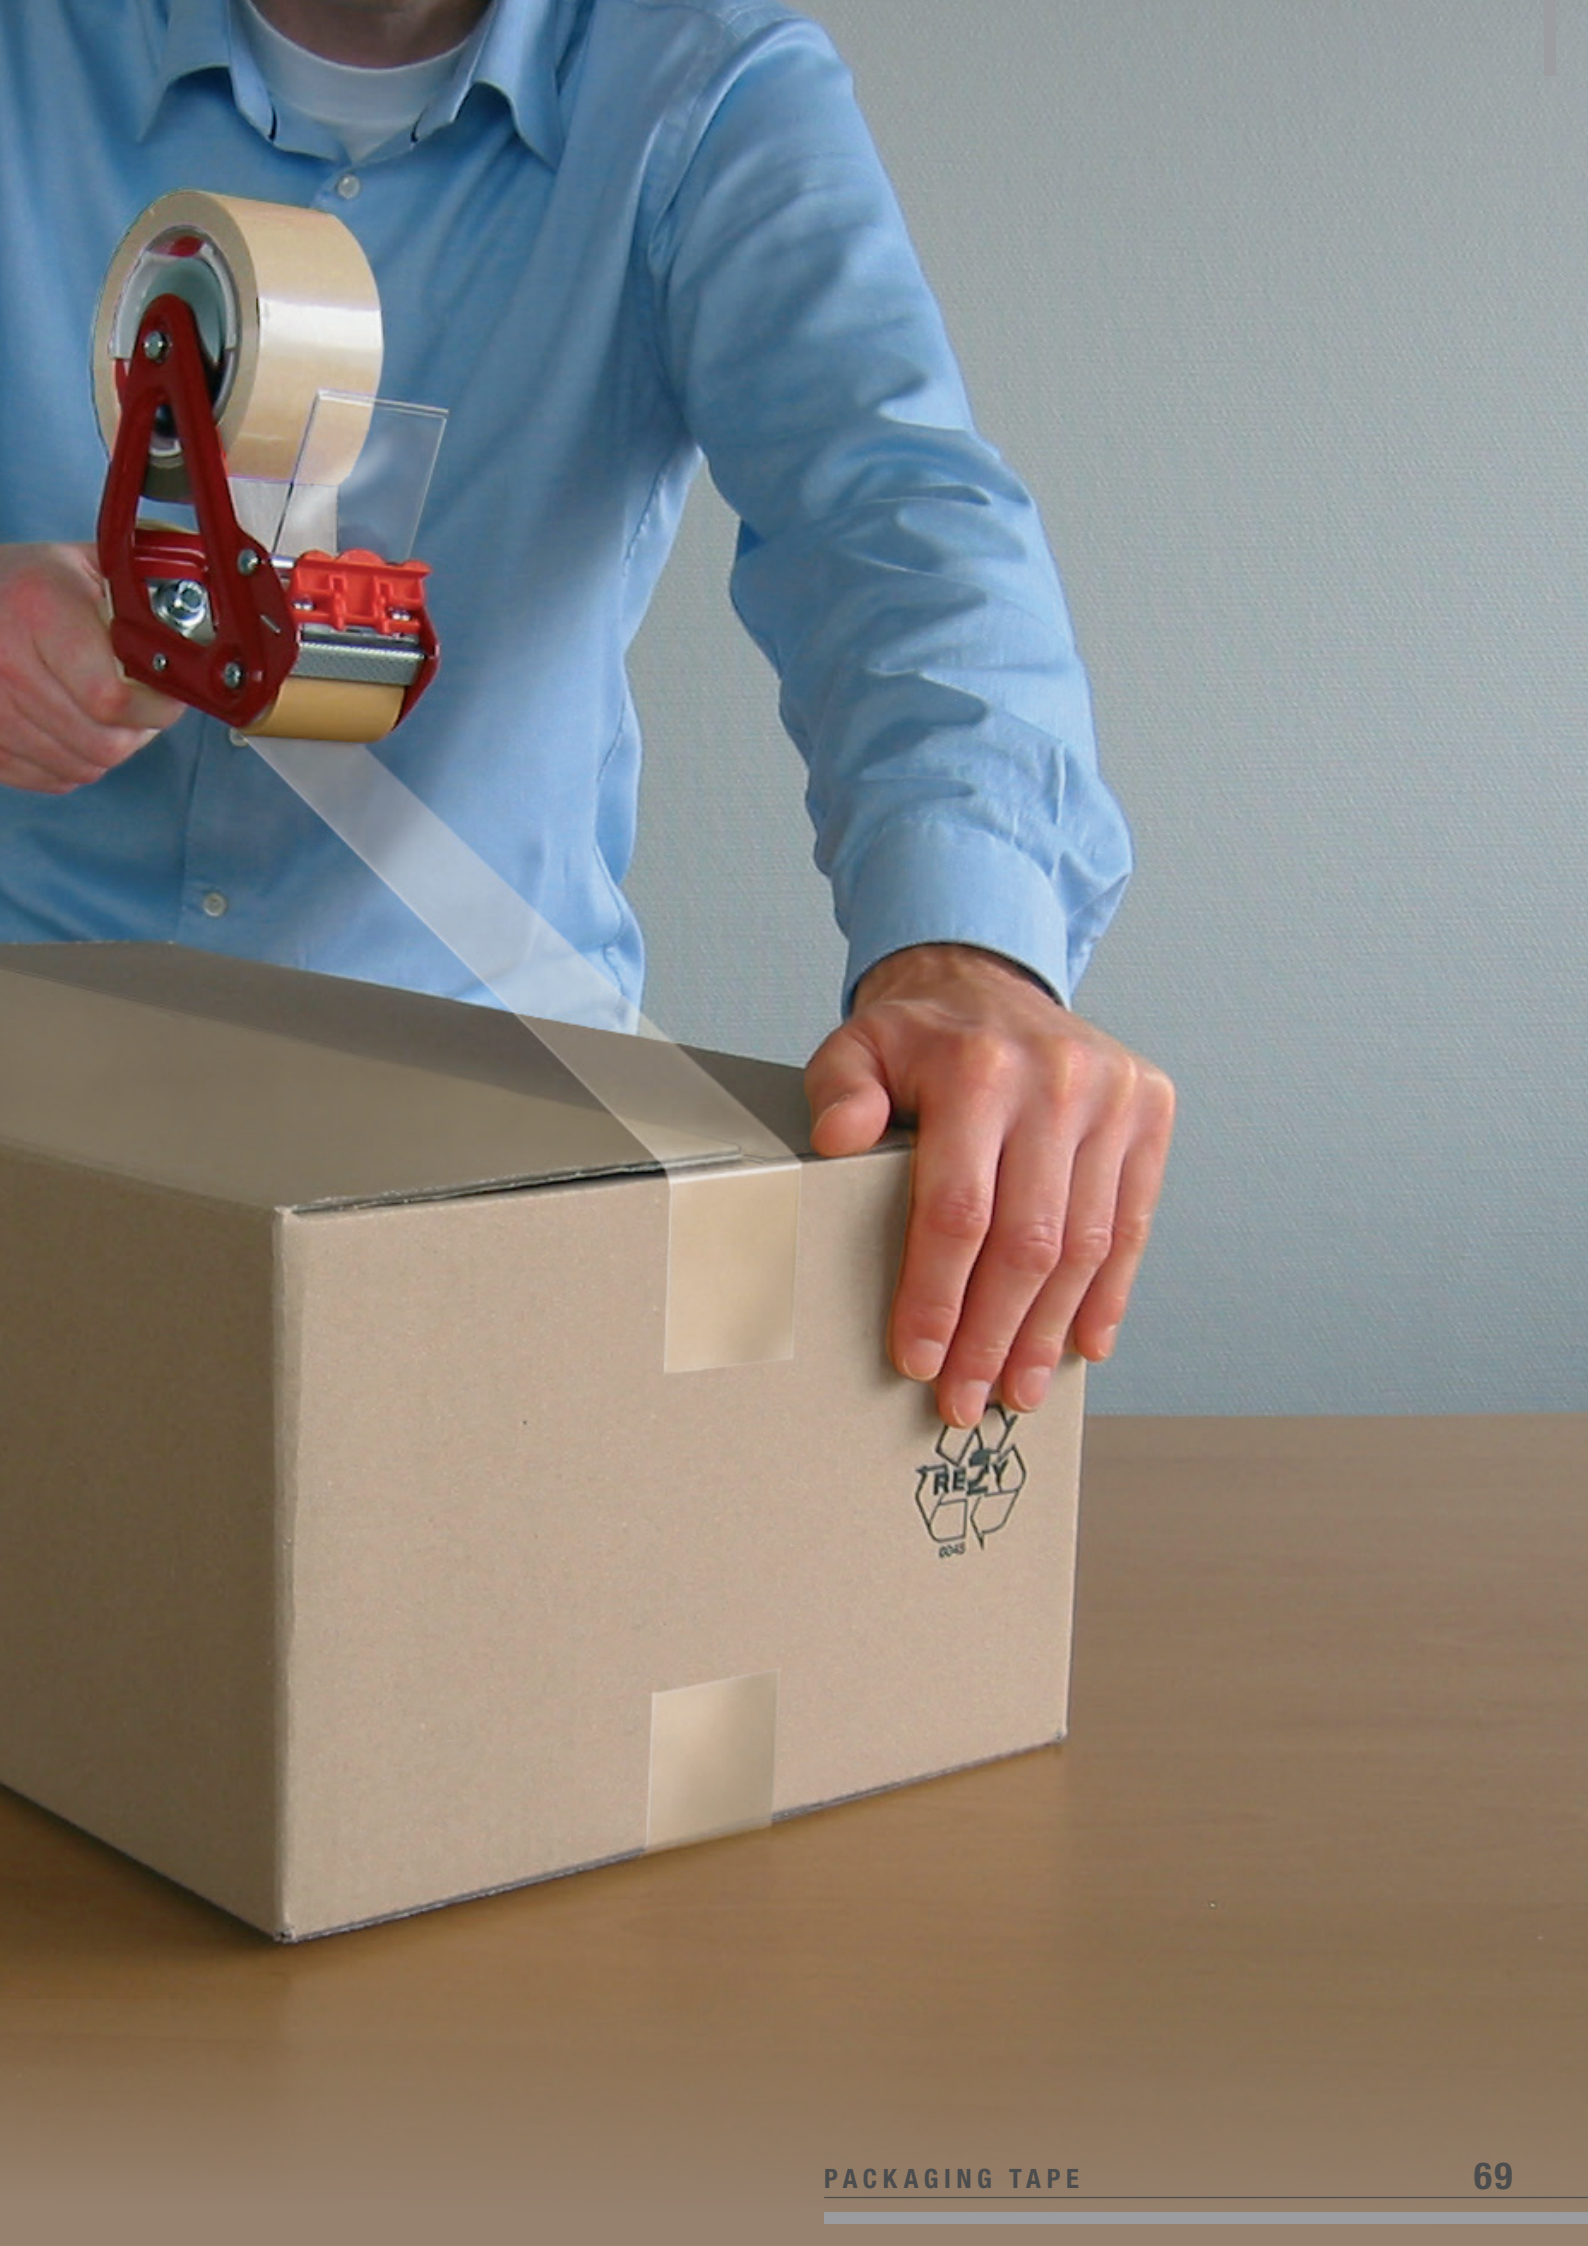

3339 PAPER PACKAGING TAPE

Sustainable premium paper packing tape made from 60% natural raw materials and 30% recycled fibers.



3339-48



PROPERTIES

- Made of FSC™ certified paper
- Very high adhesive strength
- Easy to tear by hand yet extremely tear resistant
- INGEDE certified

AREA OF USE

- For secure sealing of medium to heavy cardboard boxes and for securing during transport

Length in m	50
Width in mm	48
Sales units	20



339 PVC PACKAGING TAPE

PREMIUM PLUS

Very high tensile strength and highly adhesive.



339-20

339-30



PROPERTIES

- Brown or transparent packaging tape, made from a smooth and flexible PVC film
- Very high adhesive strength
- Very tough and sturdy

AREA OF USE

- For reliably sealing medium to heavy weight boxes and securing items for transport

Length in m	66
Width in mm	50
Sales units	36



339 PVC PACKAGING TAPE

PREMIUM

High tensile strength and adhesive strength.



339-00

339-10



PROPERTIES

- Brown or transparent packaging tape, with smooth and flexible PVC film
- High adhesive strength
- Very high tensile strength

AREA OF USE


- For reliably sealing medium to heavy weight boxes and securing items for transport

Length in m	66
Width in mm	50
Sales units	36

339 PP PACKAGING TAPE

PREMIUM PLUS

High tensile strength and adhesive strength.

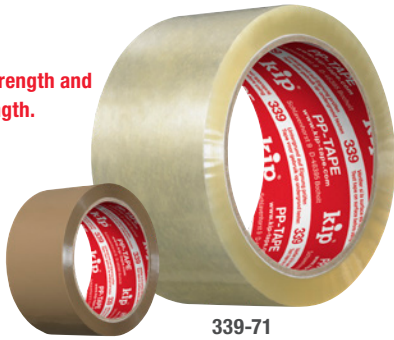

339-70

339-71



PROPERTIES

- Brown or transparent packaging tape, with smooth and flexible polypropylene film
- Good adhesive and high tensile strength

AREA OF USE

- For reliably sealing medium to heavy weight boxes and securing items for transport

Length in m	66
Width in mm	50
Sales units	36

339 PP FILAMENT TAPE

Extremely strong!
For sealing heavy boxes and hazardous goods.



339-45



PROPERTIES

- Packaging tape made from smooth, flexible polypropylene film
- Extremely strong thanks to longitudinal fibreglass reinforcement
- Very strong adhesive strength

AREA OF USE

- For reliably sealing heavy boxes, pallets and hazardous goods, and securing items for transport

Length in m	50
Width in mm	50
Sales units	18

3839 PP PACKAGING TAPE LOW NOISE

PREMIUM

Easy to use and low noise.



3839-51



PROPERTIES

- Transparent low noise packaging tape made from extra-thin polypropylene film
- Strong adhesive strength
- High tensile strength

AREA OF USE

- For reliably sealing medium to heavy weight boxes and for securing items for transport

Length in m	66
Width in mm	50
Sales units	36

339 PP PACKAGING TAPE

Printed with "Vorsicht Glas!"
High tensile strength and adhesive strength.



339-51



PROPERTIES

- Red packaging tape with black text "Vorsicht Glas!" made from smooth and flexible polypropylene film
- Good adhesive and high tensile strength

AREA OF USE

- For reliably sealing medium to heavy weight boxes and for securing items for transport

Length in m	66
Width in mm	50
Sales units	36

ACCESSORIES

Make your work easier with efficient and practical tape unwinders and dispensers from Kip®. These handy aids can save you time and effort when using Kip® products and can be combined for specific custom applications.

For example, the Ready-Masker combines the Kip® 336 Masking paper with almost all Kip® adhesive tapes to make a custom paper masker.





330 DISPENSER

Dispenser for Kip® 331 Masking papers from 22 cm wide with simultaneous attachment of one or two adhesive tapes.



330-00

PROPERTIES

- Applies 1 or 2 adhesive strips. Includes lid
- Dimensions: 34.5 x 34.5 x 26 cm

AREA OF USE:

- For reliable covering of, e.g., skirting boards, windowsills for painting and plastering work

335 READY-MASKER

Professional dispenser for Kip® 336 Masking papers with simultaneous attachment of one adhesive tape.



335-12

PROPERTIES

- Dispenser with interchangeable 25 and 35 cm cutters
- 335-00 with 25 cm tear-off rail: Dimensions 25 x 25 x 18.5 cm
- 335-12 with 35 cm tear-off rail: Dimensions 35 x 25 x 18.5 cm

AREA OF USE

- For reliable covering of, e.g., door frames and skirting boards for painting and plastering work

REPLACEMENT PARTS FOR THE READY-MASKER

- 335-05: 25 cm tear-off rail for paper
- 335-06: 35 cm tear-off rail for paper

394 MASKER APPLICATOR

Handy dispenser for the quick and easy application of Kip® maskers.



PROPERTIES

- Easy to use
- Gentle on the joints due to its lowweight
- Reduced risk of injury
- Fits in any trouser pocket

AREA OF USE

- Neat unrolling and precise application of masking tape



395 DUST PROTECTION DOOR

Dust protection door with high-quality zip.



Fabric
395-00
395-01

PROPERTIES

- No bottom edge, so e.g. trolleys can be transported more easily through the door
- Fabric door: Made of 50% recycled PP non-woven fabric, Weight per unit area of the material 50g/m²
- Breathable PP filter fleece: ensures simultaneous supply of fresh air
- Foil door: made of 30% recycled LDPE foil, foil thickness: 150µ
- Includes variable hook-and-loop fasteners to fix the open door



AREA OF USE

- Protects unaffected living spaces from dust and dirt during renovation and refurbishment work



Foil
395-02

Length in m	2,20	2,50	2,20
Width in mm	1200	1200	1200
Sales units	10	10	10
Material	Fabric	Fabric	Foil



335 FLOOR-FIX PREMIUM

Professional dispenser for quickly fixing masking materials and easy application of carpet tape.




335-14

PROPERTIES

- Back- and joint-friendly
- Quick fixing
- Telescopic up to max. 2 m
- Easy to handle

AREA OF USE

- For the quick fixing of materials and for easy, back- and joint-friendly application of carpet tape

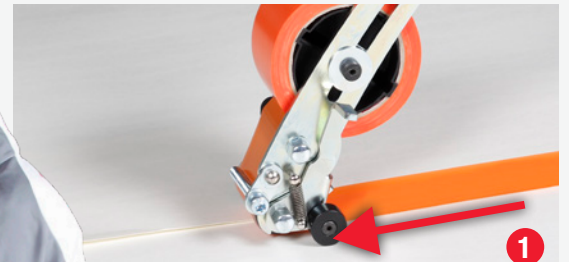

Unwind the adhesive tape using a forwards motion



Flip the pedal down to tear off the tape



Ready-fixed adhesive tape

398 DOWNPIPE FOR GUTTERS

As a temporary replacement for the downpipe on rain gutters.



PROPERTIES

- Consists of 30% recycled LDPE
- Thickness of the material 130 µm
- Mounting with adhesive tape, clamps, or cable ties possible
- Required length of the downpipe individually adaptable

AREA OF USE

- Can be used e.g., during renovation and refurbishment work to protect the facade from soiling



Length in m	150
Width in mm	ø 127
Sales units	1 roll



335 DISPENSER FOR MASKER

Plastic dispenser for
Kip® Maskers 332, 3832 and 334.

335-95

335-96



PROPERTIES

- Dispenser with metal tear-off rail
- Dimensions: 335-95: 8.5 x 11 cm and 335-96: 8.5 x 21 cm

AREA OF USE

- Quickly and completely mask large areas and nearly all types of surface both indoors and outdoors using Kip® Masker 332, 3832 and 334

346 FLEX-BLADE CUTTER WITH EXTREMELY FLEXIBLE BLADE

Innovative snap-off blade that is highly flexible and pliable.

346-00
Kip® Flex-Blade
Cutter

- Highly efficient tool for cutting all kinds of film and wallpaper
- Extra thin material ensures excellent flexibility, making it ideal for use in hard-to-reach areas
- Triple edge grinding for extremely clean cuts
- Special black tempering for improved durability and robustness
- The individual segments can be easily snapped off, as with standard cutters
- Cutter with 10 blades
- Refill packaging with 10 blades

346-01
Kip® Flex-Blade
blades (10 pcs)



354 GARBAGE BAGS

Blue bin bags made from a tough 35 µ or 70 µ film.



PROPERTIES

- Film thickness: 35 µ or 70 µ
- Made from recycled material

Item	Thickness	Dimensions	Quantity	Sales units
354-00	35 µ	0,7 m x 1,1 m	25 pcs/roll	10 rolls
354-02	70 µ	0,7 m x 1,1 m	25 pcs/roll	8 rolls

339 KIP® FILM

Highly transparent film tape.

Suitable for many applications around the home and office.



PROPERTIES

- Highly transparent
- Easy to unwind and doesn't tear
- Good adhesive strength


AREA OF USE

- Suitable for many applications around the home and office
- Extremely versatile

Length in m	20
Width in mm	19
Sales units	3

335 PROFESSIONAL DISPENSER FOR PACKAGING TAPE

Sturdy manual dispenser for professional and long-term use.

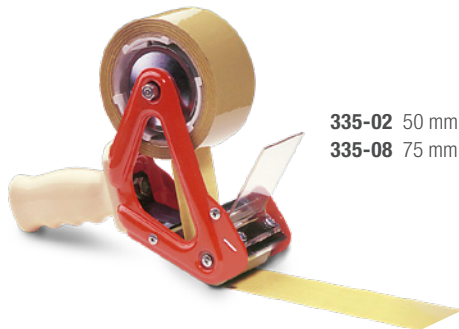

335-02 50 mm
335-08 75 mm

PROPERTIES

- Metal casing with a plastic handle
- Inclusive pressure clamp and manually adjustable roll brake
- 335-02: suitable for rolls up to 50 mm wide, dimensions: 7 x 25 x 18.5 cm
- 335-08: suitable for rolls up to 75 mm wide, dimensions: 10 x 25 x 18.5 cm

AREA OF USE

- For professional, long-term use
- Quickly and reliably seal all kinds of packages, bundle together goods and secure pallets

790 ECO CLEANER

Environmentally friendly cleaner for removing tough stains and adhesive residues.



PROPERTIES

- Cleaner made from bio-degradable substances
- Removes tough stains and adhesive residues from many types of surface
- High yield
- Contents: 750 ml

AREA OF USE

- For cleaning various surfaces
- Cleaning working materials
- Take care if using on acrylic or soft PVC surfaces



myKip® Online-Portal

Access your myKip® account at any time.

Please register to access the myKip® online portal, where you can review your orders, track your shipments, print invoices, packing list or order confirmations, and view your prices around the clock.

myKip® Registration

Contact person*

Department

Phone number

E-Mail*



myKip® - The retailer portal

At Kip®, good service is standard. Now, it's even better. As a retailer, you now have the option to submit orders to us 24/7 via our myKip® Portal.

Our platform is clearly laid out for intuitive operation. You will find it at www.my.kip-tape.com, where you can choose from a variety of functions, including:

- Placing orders easily and clearly, and submitting requests and comments
- Creating favourites lists
- Specifying desired delivery date
- Viewing your sales history, including the items you buy most often
- Current order overview and shipping details
- Searching for products, including direct link to product details on the website
- Viewing current prices

In this way, with just a few clicks you can quickly and easily order with us or get an overview of your order.

If you are having difficulty with access or have any questions, you can contact us at any time!

Adhesive tape structure and properties

The mechanical, electrical and chemical capabilities of an adhesive tape depend heavily on the materials used for the individual layers, which are described below.

RELEASE COATING AND RELEASE LINER

In single-sided adhesive tapes, the release layer is usually made from a release coating that influences the ease with which the tape unwinds and also prevents the adhesive layer remaining stuck to the back of the backing.

Double-sided adhesive tapes use a release liner as a release coating that is often made from a film or paper that has been siliconised on both sides. The release liner used also influences the ease of unwinding for double-sided tape.

BACKING

The backing is the layer to which the adhesive is applied. Depending on the material used, this layer can strongly influence the mechanical, electrical and chemical properties of the tape and therefore its usability and durability.

PRIMER

The adhesive cannot be directly applied to some backings, as they would not stick to it. This is the case with PE film, for example. These backings must therefore first be treated with a primer to ensure a reliable bond between the backing and the adhesive.

ADHESIVE

The adhesive creates the “bond” between the tape backing and the surface to which it is applied through adhesive forces (that stick it to the contact surface) and cohesive forces (forces that hold together the molecules of the glue).

The adhesive forces influence the adhesive strength. Glues with a high adhesive force have a high adhesive strength.

The cohesive forces influence the viscosity of the glue. Glues with low cohesive forces have a lower viscosity, i.e. they are more “liquid” and feel stickier to the touch. This is beneficial for adhesion to rough and dusty surfaces, but comes with the disadvantage that residues are more easily left behind on some materials due to the adhesive layer coming away when the tape is removed.

In summary, the interactions between the adhesives, surfaces and the environment (e.g. temperature, UV radiation, etc.) are very complex due to the sheer number of possibilities.

To achieve the best results, it is therefore highly recommended to test tapes before use. Table A lists the most important types of adhesive and their properties.

Technical properties of Kip® adhesive tapes

The choice of material has a strong influence on the various layers of an adhesive tape and their mechanical, electrical and chemical properties. Numerous standardised tests are available that describe these properties. The Kip® catalogue provides the following technical data:

INDOOR SERVICE LIFE

Specifies how long the tape can remain in place indoors without leaving any residues upon removal.

OUTDOOR SERVICE LIFE

Specifies how long the tape can remain in place outdoors without leaving any residues upon removal.

ADHESIVE STRENGTH (STEEL) IN NEWTONS PER 10 MM

Specifies how much force measured in newtons is required to remove a 10 mm wide adhesive tape at an angle of 180 degrees and at a uniform and defined speed from a polished steel plate.

TEMPERATURE RESISTANCE

Specifies the temperature that an adhesive tape can withstand for a short period after being stuck in place without becoming damaged or leaving behind adhesive residues.

STORAGE OF ADHESIVE TAPES

Adhesive tapes must be stored in a dry place and protected against frost and sunlight.

Tapes should ideally be stored in their original packaging.

Storage in high temperatures should be avoided as this can accelerate the ageing process of the tape.

REMOVING ADHESIVE TAPES

Adhesive tapes should be removed carefully and evenly. The angle at which it is pulled should be as shallow as possible.

When removing paper adhesive tapes, ensure that both the surface and tape are dry. If they are not dry, then the backing may tear and residues may be left behind on the surface.

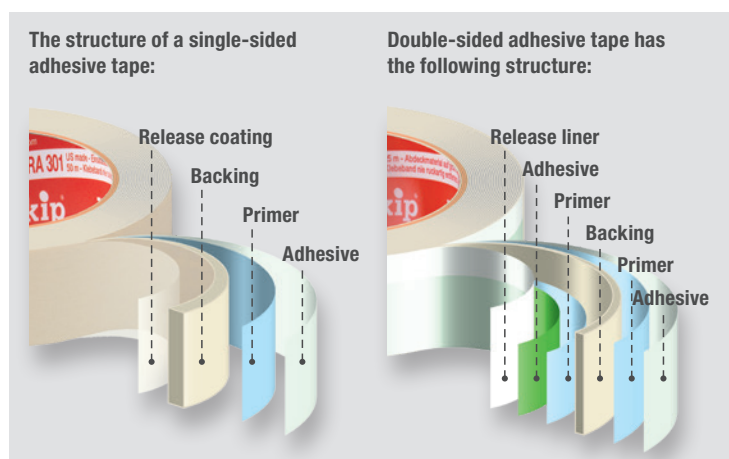


Table A ADHESIVE TYPES AND THEIR PROPERTIES

Adhesive type	Composition	Properties	Area of use
Natural rubber	Consists of ground natural rubber dissolved in solvents	<ul style="list-style-type: none"> • Very high initial adhesive strength • Marginal increase in adhesive strength over time • High shear strength/cohesion • Resistant to lower temperatures and weathering • Low UV resistance 	• For short- and medium-term use
Synthetic rubber	Synthetically produced through the polymerisation of various monomers	<p>Its properties are highly dependent on the monomers and additives used. In general:</p> <ul style="list-style-type: none"> • Very high initial adhesive strength • Marginal increase in adhesive strength over time • Less resistant to lower temperatures and weathering 	• For short-term use
Acrylates	Consist of polymerised acrylic ester monomers mixed with artificial resins and dissolved in water or solvents.	<ul style="list-style-type: none"> • Higher increases in adhesive strength over time • High resistance to temperature and weathering • High resistance to UV radiation and oxidation 	• For short- and medium-term applications, also suitable for outdoor use
Hot melt	Consists of artificial resins fused at temperatures of 130 °C to 180 °C. Once cooled, the resulting compound is highly viscous with a high adhesive strength	<ul style="list-style-type: none"> • Very good adhesive strength in normal temperatures • Limited temperature resistance • Low UV and weather resistance • Poor resistance to plasticisers if the appropriate additives are not used 	<ul style="list-style-type: none"> • For short-term use only • Residue-free removal cannot be guaranteed even after just a short period of use (within a few hours)

Table B BACKINGS AND THEIR PROPERTIES

Backing material group	Backing material	Properties	Area of use
Paper	Smooth masking tape	<ul style="list-style-type: none"> • Moderate elasticity • Flexible • Waterproof, moisture-resistant and UV-resistant depending on treatment 	• For a variety of covering and masking applications.
	Highly creped masking tape	<ul style="list-style-type: none"> • Highly elastic 	• For masking tight curves, rounded areas, etc.
	Special Washi paper	<ul style="list-style-type: none"> • Very thin and flexible • Low elasticity • High tensile strength • Waterproof, moisture-resistant and UV-resistant depending on treatment 	• For achieving extremely sharp paint lines on smooth and slightly rough surfaces
Fabric	Rayon, cotton, polyamide or fibreglass; coated or uncoated	<ul style="list-style-type: none"> • Very high tensile strength and easy to remove by hand depending on the material, thickness and mesh of the fabric • With a PE coating, resistant to water, oil, mechanical damage and a range of chemicals • Very good UV resistance when a UV filter is used • Functions as Gaffer tape with a non-reflective PE coating 	<ul style="list-style-type: none"> • Short- or long-term masking for a variety of tasks such as plastering and stucco. • For creating waterproof seals on containers • Masking for sand blasting work • For a variety of industrial and trade repair and structural work • For sealing films during asbestos removal • For bundling, fastening, etc.
Films	PVC	<ul style="list-style-type: none"> • Hard in its initial form • PVC is resistant to water, weaker acids, alkaline solutions, alcohol, oils, petrol and salt water • Benzol, some solvents and stronger acids (e.g. concentrated hydrochloric acid) can attack PVC • Good temperature stability • Its many chlorine molecules mean PVC is non-flammable 	<ul style="list-style-type: none"> • Long-term masking for a variety of tasks such as plastering and stucco • Use on weathered PVC surfaces only after prior testing • PVC film is also used to make packaging tape, warning tape, etc.
	PE	<ul style="list-style-type: none"> • Untreated PE has a milky white colour and is naturally very elastic • Resistant to water, solvents, acids and alkaline solutions • Resistant to high and low temperatures 	<ul style="list-style-type: none"> • Long-term masking for a variety of tasks such as plastering and stucco • Well suited for use on plastic surfaces such as PVC as PE is free from plasticisers and resistant to solvents • Also well suited for use in low temperatures
	PP	<ul style="list-style-type: none"> • Has a good tensile strength and a harder surface than, e.g., PE • Resistant to weak acids and alkaline solutions, grease and many organic solvents • Can be corroded by some solvents when subject to higher temperatures • Long exposure to sunlight and low temperatures can make PP become brittle • PP can be enriched using glass fibres to significantly improve its mechanical properties such as tensile strength, etc. • Such PP tape is known as filament tape 	• PP film is most commonly used to make packaging tape

Using adhesive tapes

SELECTING AN ADHESIVE TAPE

Selecting an adhesive tape depends on:

- The surface to be protected (e.g. adhesion to the surface and suitability of the surface, chemical and mechanical influences, smooth, rough, textured)
- The intended duration of use
- The type of work to be done (e.g. coating, plastering)
- Environmental factors (e.g. indoors, outdoors, range of temperatures, exposure to sunlight, UV, weathering)

TAPING CONDITIONS

To ensure a good bond, the surface should be dry and free from any dust and grease. Adhesive tapes should be used at an ambient temperature in the range +5 °C to +40 °C. Generally speaking, higher temperatures increase the viscosity and reduce the adhesive strength. Lower temperatures reduce the viscosity and increase the adhesive strength over time, but only in the mid-temperature range of approx. 18 °C to 25 °C.

Rolls of tape that are too warm or too cold should be brought to a normal ambient temperature (ideally around +15 °C to +30 °C) before use. When removing adhesive tapes, the ambient temperature should not be too low (ideally > 5 °C) as the tapes may otherwise be more difficult to remove and leave behind residues. If adhesives tapes must be applied in environments where the ambient or surface temperature is below 5 °C or above 40 °C (e.g. on metal heated by the sun), then special adhesive tapes should be used such as tapes using an acrylate adhesive that can tolerate higher temperatures.

EVALUATING THE SURFACE

As previously mentioned, the interactions between adhesives, surfaces and the environment are very complex due to the sheer number of possibilities. Where the adhesive strength of the tape is higher than the adhesiveness of the surface to which it is applied, then damage may occur upon removal. It is therefore important to first evaluate the surface to which the tape will be applied for its adhesiveness.

The following tests are usually done:

- Visual inspection
- Wipe test
- Scratch test
- Tape removal test/adhesive test

Performing a tape test has proven itself very effective in practice. When doing tape tests, a tape with a higher adhesive strength than is intended for use is attached to the surface (use a length of adhesive tape approx. 10 cm long and press down firmly) and quickly removed. If there is no damage to the surface from removal of the tape, then the weaker adhesive tape can be safely used. Where a surface cannot be reliably evaluated on the spot, e.g. due to the effects of weather, then a tape sample should be attached for a longer period (at least 24 hours) before the actual taping work is performed in order to reliably determine the adhesive-specific properties (increasing adhesive strength of the glue). If a long duration test results in removal damage to the surface, then a weaker tape should be used. Alongside testing, the following points should be observed.

TAPING ON GLASS

Where tape is to be bonded to glass that is directly exposed to sunlight (e.g. tapes placed on the inside of a window pane), then adhesive tape with a UV-resistant acrylate glue should be used, because direct exposure to sun will reduce the tape's useful life and UV resistance.

TAPING ON WOOD

When working with untreated or treated wood, adhesive tapes with the lowest possible adhesive strength should be used. Tapes should be removed slowly and at an angle to avoid tearing the wood or the coating. Where there are any mechanical loads, an additional adhesive tape, e.g. Kip® Cloth tape, should be placed on top of the weaker tape (double taping).

TAPING ON PLASTIC

Plastics differ depending on whether they are new or old and weathered. Our experience has shown that decomposition products can make weathered plastics a difficult surface for using adhesive tape.

In rare cases, plasticisers may migrate between

the adhesive tape and plastic causing a discolouration in the plastic.

It is therefore highly recommended to use tapes on plastics for short periods only. We further recommend using our plasticiser-resistant Kip® 319 PE protective tape on such surfaces.

A further problem can be created by changes to the surface qualities of weathered plastics. The weathered layer may be stripped away when the tape is removed. This can result in discolouration of the surface.

Discolouration spots can also occur if weathered or new plastic surfaces are completely taped over as bubbles may develop due to different reactions with the surface.

The appearance can be restored by the later application of a suitable cleaning agent.

TAPING ON METAL

Protection used on uncoated metals (e.g. zinc, titanium zinc, copper) may result in the build up of condensation and therefore corrosion. To prevent this, cover for a short period only or cover the metal entirely. In this regard please also note that completely covering the metal with protective film can also lead to problems if there are any bubbles under the film. Any bubbles can result in the appearance of corrosion.

All metal surfaces are subject to natural oxidation/ageing. Areas of metal that are taped over will experience reduced oxidation/ageing. This may result in a different visual appearance of the metal under the tape once the tape is removed. This is unavoidable. The appearance will equalise again in a short time depending on the metal (a period of months).

As mentioned in other sections, when using tape on metal the temperatures on the metal's surface should also be considered when choosing an adhesive tape (e.g. taping on south-facing zinc facades during the summer).

TAPING ON NATURAL STONE

Our experience has shown that natural stone is a challenging surface for adhesive tapes as discolouration around the area where the tape is applied can appear after just a short period of time.

Duct tapes are not suitable for use on natural stone. We therefore recommend masking natural stone only with non-adhesive materials. For example, our 336 and 331 masking papers are ideal here, along with our (professional) tarpaulins (page 59).

These can be additionally fastened with strips of adhesive tape as needed. When doing so, make sure not to affix the adhesive tape to the natural stone.

TAPING ON PLASTER

Adhesive tapes with a higher adhesive strength that can adapt to the contours of the surface should be used on rough textured plaster. Kip® 326 Duct tape is particularly recommended here, as it is very flexible with a high adhesive strength.

For smooth or felted plaster, tape with a lower adhesive strength can be used. The backing should be chosen based on the work that will be carried out later on. When using multiple colours or coats, we recommend 380 FineLine cloth tape, as this allows sharp paint lines to be created whilst also providing a sturdy backing (tape does not tear when being removed).

TAPING ON COATINGS

If tape is to be applied to a coating, it must be ensured that the adhesiveness of the surface coating is higher than that of the glue used on the tape. Damage to the coating may otherwise occur (stripped away, discolouration, etc.). We therefore recommend testing tapes in advance to determine which tape is most suitable. It is also important to ensure that the paint has fully dried before applying any partial or complete coverings. If the paint is not completely dry, then discolouration can occur or paint may be stripped away.

TAPING ON WALL COVERINGS, PAPER, TEXTILES

When working with wallpapers or textiles, adhesive tapes with the lowest possible adhesive strength should be used such as our Kip® 309 WASHI-TEC® Wallpaper.

PLEASE NOTE

All technical data, tips and information given in this catalogue is correct to the best of our knowledge. It is, however, provided without guarantee. Complaints will only be taken into account if we can establish the fault clearly on-site. In such a case, the adhesive tape must not yet have been removed from the object. If you have any further questions or queries, our sales and office staff will be more than happy to advise you.

The technical data and product characteristics provided in this document are based on internationally recognised testing methods and do not represent any kind of guarantee with regard to product properties or performance. Individual rolls may deviate slightly from the mean values. Adhesive tapes should be tested in advance to determine their suitability for a particular purpose, e.g. by a tape removal test.



• www.kip-tape.com



Kip GmbH • Schlavenhorst 9 • 46395 Bocholt • Germany • **T** +49 (0) 2871 23466-0 • info@kip-tape.com